

**BLUE STAR VISI COOLERS.** 

# THREE DOORS TO BIGGER PROFITS.



Blue Star presents a range of Visi Coolers (C Series) with three doors for the first time. These Visi Coolers are high on performance and perfect for heavy—duty applications. Equipped with a ventilated cooling mechanism that ensures both fast and uniform cooling, these visi coolers make sure every shelf and every corner is just as cold as the other.

There is no smarter way to preserve and display your products at the same time. The C Series Visi Coolers meet the demands of commercial businesses such as supermarkets, departmental stores, general stores, and restaurants. And while their heavy—duty compressors cool quickly even in harsh Indian summers, the ample visibility of your products ensures quick profits as well.



#### **Uniform cooling**



Heavy-duty compressor



Digital controller for temperature display



Clear product visibility with reflective glass



Self-closing doors



Locking facility in all models



**LED lighting** 



Eco-friendly refrigerant



Description	Units	VC600CD VC600CD-B	VC800CD VC800CD-B	VC1200CD VC1200CD-B
Gross Capacity	L	568L	730L	1075L
Temperature		+1°C to +10°C	+1°C to +10°C	+1°C to +10°C
Power Supply		220V/50Hz/1Ph	220V/50Hz/1Ph	220V/50Hz/1Ph
Refrigerant		R290	R290	R290
No. of Doors	Nos	2	2	3
Provision for Locking		Available	Available	Available
Digital Controller		Available	Available	Available
Overall Dimensions (including hinge, castor etc)	mm	880x610x1973	1120x610x1973	1600x610x1973
Net Weight	kg	96.5	113	157
No. of Shelves	Nos	Wire /8	Wire /8	Wire /12



# BLUE STAR COOLER CUM FREEZER.

# **MULTIPLE NEEDS. SINGLE SOLUTION.**

The Blue Star Cooler-cum-Freezer is just what you need when you have



Features



Dual compartment machine configured as freezer in one and cooler in the other



Two separate lids ensure independent access to freezer and cooler chambers



**Excellent Drain Design** 



Easy to clean and maintain hygiene

Fast Freeze Mode





Model Name	Tiu	CHFK275DGS/-B/-G	CHFK350DGS	CHFK400DGS	CHFK500DGS
Cooler Capacity	占	105	150	148	162
Freezer Capacity	늄	139	185	217	319
Total Capacity	늄	244	335	365	481
Temperature Range – Cooler	Jo	2ºC to 8ºC	2ºC to 8ºC	2ºC to 8ºC	2ºC to 8ºC
Temperature Range – Freezer	J <sub>a</sub>	-18°C to -22°C	-18°C to -22°C	-18°C to -22°C	-18°C to -22°C
Refrigerant		R600a	R290	R290	R290
Overall Dimensions (WxDxH)	Ē	1069 X 599 X 860	1336 X 665 X 865	1355 X 770 X 880	1535 X 845 X 915
Overall Dimensions (WxDxH)	Inch	42 X 24 X 34	53 X 26 X 34	53 X 30 X 35	60 X 33 X 36
Net Weight	kg	44	52	61	70





#### **AUTH. DISTRIBUTOR OF**













No

#### **DEEP FREEZER**





G2W



#### **VISI COOLER**









VC325D



VC400A



SC500F



No



SC650F



VC600CD





#### **DEEP FREEZER**



#### HARD TOP CHEST FREEZER



CUF-320



CVF - 405



CVF - 500

#### **COMBO COOLERS**



CBHT - 400 Ltr. Combo



CBHT - 300 Ltr. Combo

#### **FLAT GLASS TOP FREEZER**





CT - 340



CT - 440



#### **VISI COOLER**







VCGT - 220



VCGT - 320



VCGT - 450



VCGT - 550 DD



VCGT - 1000 DD





# CONVERTIBLE GREEN FREEZER





GFRN250SDUC

GFRN350SDUC/DDUC

GFRN450DDUC

**GFRN550DDUC** 

#### **CONVERTIBLE HARD TOP DEEP FREEZER**



#### **CURVED GLASS TOP DEEP FREEZER**













SFR350GTS (Single Frame - Glass Top)

#### **EUTECTIC DEEP FREEZER**

#### **COMBI DEEP FREEZER**



**GFRN350DDET** 



COMBI300A

#### VISI COOLER



RVC200A



RVC320A



RVC500A



RVC600A



RVC1100B



#### **AUTH. DISTRIBUTOR OF**







### **Our Products**

**Deep Freezer** 

- **VISI Cooler**
- Combo Deep Freezer Water Cooler

  - Storage Water Cooler

# Cool Point (FRIZZIN

Plot No. 33/1, GF, Shriji Complex, Nr. Jaldhara Society. Isanpur, Ahmedabad. Gujarat, India.

M.: +91 98984 34499 | +91 63553 73495 | E-mail: coolpoint264@gmail.com www. frizzinindia.com

# BLUE STAR GLASS TOP DEEP FREEZER. BETTER MERCHENDISING. ENHANCES IMPULSE.

freezers are energy—efficient and economical. Selected models



### Features



Industry-leading cooling, maximises display. Scooping depth for candy cones, boosting profits with increased storage capacity. Optimised Storage Space



High Density PUF Insulation For better holding time.



Temperature controller on side grill ensures 100% space for branding on the front.

Maximum Frontal Branding Area

\*



Plastic Basket Long-lasting, corrosion-free, food-grade.







Multi-Colour Frame Options Allows for customisation to enhance brand display and awareness.

# Technical Specification

Model	Unit	GT5-350N/NP	GT5-410N/NP	GT5-475N/NP	GT5-590N/NP
Star Rating		5	5	5	5
Gross Capacity	1	315	365	421	530
Temperature Range		-13°C to -26°C	-13°C to -26°C	-13°C to -26°C	-13°C to -26°C
Refrigerant		R290	R290	R290	R290
No. of Lids		2	2	2	2
Inner Cabinet		Embossed	Embossed	Embossed	Embossed
PUF Thickness	шш	65	65	65	99
Overall Dimensions (WXDXH)	ww	1125 X 670 X 859	1265 X 670 X 859	1410 X 670 X 859	1700 X 670 X 859
Overall Dimensions (WXDXH)	Inch	44 X 26 X 34	50 X 26 X 34	56 X 26 X 34	67 X 26 X 34
Net Weight	Kg	52/55	26/28	60/64	68/72
Baskets- Metal/Plastic		4/4	4/5	9/9	9/9

10-12-

<sup>\*</sup>LED light option available only in NL/ NPL Versions



Blue Star takes great pride in celebrating its long and successful journey of growing to become an industry leader synonymous with innovation, quality and world-class customer experiences, throughout several countries across the globe. Leveraging over eight decades of experience in building air conditioning and refrigeration solutions, Blue Star's commercial refrigeration offerings are spread across a variety of applications at hotels, hostels, schools & universities and eateries. Each world-class solution is designed for optimum preservation and storage of foods and produce, ensuring freshness for longer periods. Commercial refrigeration solutions include reach-in chillers & freezers, under counter chillers & freezers, modular cold rooms, multi-deck open chillers, island freezers. deep freezers and chest coolers. Blue Star also offers the widest range of storage water coolers with different choices of purification, all tested for superior performance in high-ambient conditions. Apart from every product complying with high-quality ISO standards for hygiene and sanitation, Blue Star manufactures multiple models under each product category to suit the requirements of customers across the spectrum.

#### **QUALITY ASSURANCE**

At Blue Star, we believe that quality is not just a policy but a way of life. We are deeply committed to delivering quality products and services and are constantly looking for new ways to achieve this. We have rigorous quality checks in place for our manufacturing process in Commercial Refrigeration. And this is backed by various certifications, registrations and compliances from internationally acclaimed bodies.

#### **WORLD-CLASS MANUFACTURING**

Blue Star's foray into manufacturing began in the 1940s from a small office in Forbes Street in Colaba, Mumbai. In the mid–1960s, we expanded our manufacturing base with a factory in Thane, Mumbai. Today, Blue Star operates world–class manufacturing facilities at Dadra, Himachal Pradesh, Wada and Ahmedabad. With modern, state–of–the–art manufacturing technologies and equipment adhering to global quality standards and manufacturing processes, we have been delivering products of consistent quality both in India and international markets. In all, we have a manufacturing footprint in excess of 1 lakh sq. mt. manufacturing over 300 models across 25 product lines.











#### WADA – THE PRIDE OF OUR MANUFACTURING PROWESS

Our Wada plant is a shining example of what Indian manufacturing can be. Set in about 25,000 sq. m. of space, it is the largest factory of Blue Star. With a modular production line that responds to fluctuations in production and automatically controls production progress by taking advantage of IoT (Internet of Things), this plant is a big step towards a bigger future. A model factory for Blue Star with industry 4.0 setup in adopting the latest technology such as robots, digital twins, factory simulation, flexible manufacturing, 100% turnaround traceability, the Wada plant has the capability to produce over 2 lakh energy–efficient freezers and 1 lakh storage water coolers. The plant also has a flexible setup that allows the Company



to scale up production according to customer demand while following strict quality management with a robust, centrally monitored and computerised performance—testing that is controlled over WiFi. More importantly, this facility follows Blue Star's philosophy of being committed to the environment and is built with 75% of the factory roof area covered with solar power generators, making it one of the few green factories in India.

#### **CERTIFICATIONS**

Our manufacturing facility at Wada, India has been awarded the Green Building Certification for being eco-friendly and zero pollution. All our manufacturing facilities are also ISO 9001:2015 quality certified for the entire manufacturing and product output process.







#### RESEARCH AND DEVELOPMENT

Blue Star is one of the pioneers in introducing advanced technology and applications to the Indian market. As a philosophy, we focus on Digital Technology and Sustainability, with continuous investments and focused efforts in R&D. Backed by a new—age infrastructure, we take pride in having one of the best R&D centres in the Indian Commercial Refrigeration industry. Our R&D facility is recognised by the Department of Scientific & Industrial Research (DSIR). Government of India.







The R&D facility also has psychrometric test facilities to conduct performance tests in line with international testing standards.

The R&D division caters to our Indian and global businesses while also designing products as an original design manufacturer (ODM) for several international brands. Significant investments have been made in building performance and reliability labs, virtual modelling and virtual performance testing softwares among other technologies. Our chiller test labs are AHRI certified and NABL—accredited with regard to room air conditioners and ducted systems.

We have six registered designs and have applied for 30 patents. Our technical capabilities are recognised by the policy making departments of the Government of India, and we play a vital role in developing standards for energy efficiency and safety, representing the industry across national and international forums. In other words, R&D is always an integral part of our business.

#### **ENSURING AN EXCELLENT FINISH**

Our production facilities use raw materials that meet the highest quality standards. The equipment used to process the steel includes CNC machines such as the Amada punch press, hydraulic press and specialised microprocessor—based protection and resistance welders. All these machines ensure superior quality in cabinet fabrication with high tolerances.



#### **AFTER-SALES SUPPORT**

Blue Star strives to ensure a world-class customer experience with prompt resolutions to your concerns and service requests through a cohesive network of 500+ authorised Expert Service Centres in conjunction with over 800 Sales and Service Dealers around India.

#### **BENEFITS OF BLUE STAR CARE**



#### Strong Service Network of 2100+ Centres Across India

Blue Star Care functions across a tight-knit network of more than 2,100 centres across the country to ensure prompt resolutions to your service requests.



#### **Unmatched Technical Competency**

By employing the use of modern technology and applying the right knowledge, Blue Star Care offers expert solutions to technical issues faced with your Refrigeration Products.



#### 10 Seconds to reach us

Use the Blue Star Customer Care Mobile App to raise a service concern in under '10 seconds'. A field executive will be notified of your service request and will come back to you with a resolution; and close the service call using the mobile app post receiving your nod of approval on the issue being resolved.



#### 24 x 7 Customer Call Centre

Simply call 897 678 1177 or SMS "Service" to 57575, or mail your queries to customer service@bluestarindia.com at any time of the day (or night). We vouch for immediate registration of complaints, a committed response as well as a resolution to your refrigeration issues.



#### Service On Wheels

Blue Star Care has a fleet of 200+ service crew vehicles that make reliable after sales services easily accessible, around the country.



#### Blue Star's Customer Care App For Mobile Devices

Download the Blue Star Customer Care App available in both Google Play and App Store to register your products and raise any service request.





### SEPRATER-01

### BLUE STAR STORAGE WATER DISPENSER – PLATINUM SERIES.

#### STYLED WITH ELEGANCE.



#### **Features**



Smart and ergonomical design



UV & UV+RO purification



Cold/Normal Temperature water



Faster cooling



Hot water faucet with Child lock



Eco-friendly refrigerant



**LED Indicator** 



In-situ power saving PUF insulation

Blue Star brings you Platinum Series, a new range of Storage Water Dispenser that gives you water that's hot, cold and normal. You also get models which give you the option of UV and UV+RO purification. No matter what you choose, you get pure water at the temperature you want along with style that adds to your décor.



	Description	P6080E-SL	P6080UVE-SL	P6080UVR0E-SL
	Storage Capacity (L)	80	80	80
	Capacity with Comfort Level Water Outlet Temp at 18°C at Rated Condition (L/hr)	60	60	60
	Storage Capacity – Cold	65	65	65
	Storage Capacity – Ambient	15	15	15
Performance Parameters	Storage Capacity – Hot	2	2	2
	Total Running Current (A)	7.5	10	12.5
	Total Power (W)	1575	1630	1700
	Thermal Insulation for Tank	PUF	PUF	PUF
	No. of Faucets (Cold/Hot/Plain)	1/1/1	1/1/1	1/1/1
Filtration Stages	No. of Stages for Filter cum Purifier	-	1) Pre-Filtration 2) Pre-Carbon 3) Post-Filtration	1) Pre–Filtration 2) Pre–Carbon 3) Post–Filtration 4) RO 5) Post–Carbon
UV	UV Purification	-	Yes, Last Stage	Yes, Last Stage
	RO Membrane Rating (USD)	-	-	400
D0 0	RO Membrane Operating Temperature	-	-	15°C to 45°C
RO System	RO Membrane Flushing	-	-	Every 12 hours
	RO System and Water Cooler Operating Voltage	-	-	220-240 V
	Storage Tank Material	SS304	SS304	SS304
	Outer Body Material	Pre-Painted Sheet	Pre-Painted Sheet	Pre-Painted Sheet
Body	Type of Product Construction	Concealed	Concealed	Concealed
	Type of Installation	Indoor	Indoor	Indoor
	Top Lid Type	Hinged	Hinged	Hinged
	Dimension (W x D x H) mm	660 x 575 x 1575	660 x 575 x 1575	660 x 575 x 1575
Dimensions and Net Weight	Net Weight (kg)	58	71	77
	Refrigerant	R134a	R134a	R134a
Colour Option	-	Silver	Silver	Silver

#### BLUE STAR STORAGE WATER COOLER.

#### **COOLS WATER SURPRISINGLY FAST.**



Blue Star understands that the consumption of chilled water in places like schools, colleges, offices and other commercial buildings is always high and frequent. Hence a robust water cooler, which cools water super fast is

The storage water coolers range from Blue Star has a rugged and powerful compressor which cools water really fast. It comes with stainless steel body for more durability. With power saving insulation and comprehensive warranty, these coolers are best in terms of value for money. The use of eco-friendly refrigerant also makes them safe for the environment.





Faster cooling



Eco-friendly



In-situ power-saving PUF insulation



Sturdy compressor and trouble free operation



Silent operation



Nationwide Blue Star network for prompt service



Food grade SS tank and body

#### BLUE STAR STORAGE WATER COOLER.

#### **COOLS WATER SURPRISINGLY FAST.**

#### **SDLX** series



#### Stainless steel body

Your water cooler will look new even after years of use. No rusting or corrosion.



#### Stainless steel tank

For safe drinking water, year after year.



#### **Easy controls**

The externally mounted thermostat makes it easy to set water temperature. No need to open service panels.



#### Speedy drainage

The extra large, stainless steel water tray prevents splashing and ensures fast drainage of water.

#### **NST** series



Adjustable cold water thermostat



Sturdy, moulded/flat/ extended plastic legs



Stainless steel tank



Auto cut-out



Pre-coated outer body, with front SS panel for better corrosion resistance



Riveted body assembly



Mechanically expanded condenser



Voltage over-load compressor protection



Front panel in stainless steel

#### **Technical Specification Of SDLX Series**

Model	Nominal Cooling Capacity (Litres/hr)	Storage Capacity (Litres)	No. of Faucets	ı	Dimensions (m	m]	Weight (kg)	Normal Demand (glasses	Refrigerant	Current (Amps)
	(EIII CS/III )	(EIII CO)		Width	Depth	Height		per hr.)		
SDLX2020-ET	20	20	1	400	400	1060	29	100	R134a	2
SDLX240	20	40	1	440	440	1185	32	100	R134a	2
SDLX4080B	40	80	2	665	485	1140	44	200	R134a	2
SDLX6080B	60	80	2	665	485	1140	45	300	R134a	2.5
SDLX60120C	60	120	2	755	575	1180	56	400	R134a	2.8
SDLX150150C	150	150	2	812	612	1145	66	750	R22	7.5
SDLX200400C	170	400	4	1140	770	1490	111	850	R22	9.5

#### **Technical Specification Of NST Series**

Model	Nominal Cooling Capacity	Storage Capacity (Litres)	No. of Faucets	ı	Dimensions (m	m]	Weight (kg)	Normal Demand (glasses	Refrigerant	Current (Amps)
	(Litres/hr)			Width	Depth	Height		per hr.)		
NST2020	20	20	1	400	400	990	29	100	R134a	2
NST6080B	60	80	2	665	485	1140	45	300	R134a	2.5
NST6080C	60	80	2	665	485	1140	45	300	R134a	2.5

#### Technical Specification Of PC (Plain And Cold) Series

Model	Nominal Cooling Capacity	Storage Capacity (Litres)	No. of Faucets	ı	Dimensions (m	m)	Weight (kg)	Normal Demand (glasses	Refrigerant	Current (Amps)
	(Litres/hr)			Width	Depth	Height		per hr.)		
PC240	20	40	1P+1C	440	440	1085	33	100	R134a	2
PC4080B	40	80	1P+1C	665	485	1140	45	200	R134a	2
PC15150-3T	150	150	1P+2C	812	612	1145	67	750	R22	7.5

BLUE STAR STORAGE WATER COOLER – WARM & COLD.

# PERFECTLY DRINKABLE WARM, EVERY SINGLE TIME.



Blue Star's new range of warm and cold storage water coolers gives you a comfort you will love: drinking water at just the right kind of warmth. No mixing hassles anymore. It even maintains optimum temperature during harsh summers and icy winters, making it the perfect choice for those who are health-conscious. All with the backing of our Gold Standard service.

#### **Features**



Warm and cold temperature faucets



Speedy Drainage for easy cleaning

**\*\*** 



Instant warm water dispensing



Eco – friendly



All season water cooler: Switches available to transform warm and cold water to normal



Silent operations



Food grade SS (Stainless Steel) Tank



Sturdy compressor for durability

Model	Cooling Capacity (Litres/ hr)	Storage Capacity (Litre)	No. of Faucets	Dimensions WxDxH (mm)	Weight (kg)	Normal Demand (glasses per hr.)	Refrigerant	Current (Amps)	Water Over Flow (Connections)	Type of Compressor
CW2020	20	20	1W+1C	400x400x990	34	100	R134a	2	1/2 BSP	RECIP
CW2040	20	40	1W+1C	440x440x1085	34	100	R134a	2	1/2 BSP	RECIP
CW4080	40	80	1W+1C	665x485x1140	46	200	R134a	2	1/2 BSP	RECIP
CW150150	150	150	1W+2C	812x612x1145	68	750	R22	7.5	1/2 BSP	ROTARY

#### BLUE STAR WATER COOLERS WITH IN-BUILT UV PURIFICATION.

## PURIFIES COOL WATER JUST BEFORE YOU DRINK IT.



#### PROVEN FILTRATION TECHNIQUES FOR THE PUREST WATER



**UV** Purification

UV filters, using robust and reliable technology, ensure contamination—free, safe drinking water.



**Multiple Stages of Filtration** 

Besides the UV stage, various other filters ensure clean, odourless, tasty drinking water.



Last-point Purification

Innovative design, using proven last-point UV technology, ensures that filtered water is not exposed to further contamination before delivery at the faucet.

Blue Star is already a leader in the storage water cooler market, and we now bring you storage water coolers with an in-built purification and filtration process. The technology and design are so well put together that they give you last-point purification. This prevents contamination even post the filtration stage and ensures safe drinking water at the faucet. Impure drinking water is one of the main sources of infection, even mild poisoning in many cases. Hence, it is important to build purification processes into the water system.

#### **Features**



#### **Electronic Eye**

Monitors purification process and stops water flow if the purification is inadequate.



#### Faster Cooling

Efficient design, including the rectangular tank and forced fin and tube condenser, maximises heat transfer and ensures faster cooling.



#### **Lower Power Consumption**

Consumes less power as compared to equivalent models due to its smart design.



#### High Throughput

Large tank and the overall system designed for high consumption volumes.



#### Longer Life

Non-corrosive SS outer body ensures longer life, brighter looks and smoother finish, while rugged plastic legs reduce corrosion of base.



#### Contamination-free Storage

Food grade SS 304 stainless steel inner tank keeps the stored water contamination—free.



#### Space Saving

Compact design saves precious real estate.



#### Reliability

Reciprocating compressor can operate under tough ambient conditions for long hours. In case of failure, it can be repaired in most cases thus lowering maintenance costs.



#### **Ease of Service**

Thoughtfully designed so that all important components are individually and separately accessible for easy service and maintenance.

#### **BLUE STAR WATER COOLERS WITH UV PURIFICATION**

Ultraviolet (UV) rays are proven to be effective in killing harmful bacteria and microbes that may be present in drinking water. At the same time, the treated water retains all its minerals and salts.


This is why our water coolers use ultraviolet radiation as a pre-treatment to sterilise and disinfect the water before it is available at the faucet.

These coolers also come with a further two-step filtering process that removes physical impurities, colour, organic impurities and chlorine from the water before it is dispensed.

A unique feature of these coolers is the last-point purification that uses UV technology to ensure that the water dispensed remains pure and uncontaminated even during the post-filtration flow.

#### UNIQUE 3-STAGE PURIFICATION PROCESS

- Unique polypropylene yarn candle to remove physical impurities from input water
- Activated carbon cartridge for removing colour, organic impurities and chlorine
- UV disinfection chamber to disinfect waterborne disease-causing bacteria and viruses

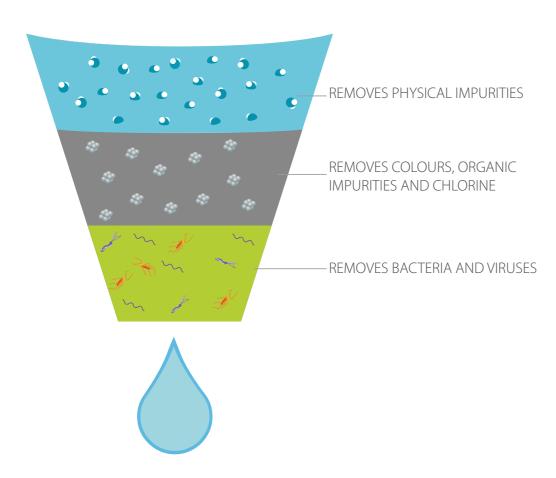

Storage Wa	tor Coolor w	ith HV Durifi	cation
Storage wa	iter I .nnier W	ITN I IV PI IPITI	ratinn

	Description	SWCSDLX6080UVE	SWCNST80120UVE	
	2000 i pilosii	0110000011	3113113133123312	
	Storage Capacity (up to float valve level)	80 Ltr.	120 Ltr.	
	Capacity with Comfort Level Water Outlet Temp at 17°C ± 1°C at Rated Condition	60 LPH	80 LPH	
	Running Current In AMPS (max) at Rated Condition	3.2 ± 10%	4 ± 10%	
	Power in Watts (max) at Rated Condition	625 ± 10%	825 ± 10%	
Performance Parameters	Operating Power Supply	230 ± 10% V /	AC, 50Hz, 1 PH	
	Thermal Insulation for Storage Tank	Pl	JF	
	No. of Faucets	2	3	
	No. of Cold Water Faucets	1	2	
	No. of Normal Water Faucets	1	I	
	No. of Stages	3	3	
	1st stage of Purification	Sediment	filtration	
	2nd stage of Purification	Carbon t	Filtration	
Filanching Observe	3rd stage of Purification	UV filt	ration	
Filtration Stages	No. of Purifier Circuit	2	3	
	Visual Controls (LEDs)	Yes		
	Cooling on / off Switch	Yes		
	Operating Temperature	15°C to 45°C		
	UV System & Water Cooler Operating Voltage	180 – 250V		
UV System	Minimum Water input Pressure in Kg/mm²	0.	4	
	Maximum Water input Pressure in Kg/cm²	2	2	
	Storage Tank Material	SSS	304	
Body	Front Panel Material	SSS	304	
	Side & Back Panel Material	SS304	Pre Coated Sheet	
Dimensions and Net	Dimensions (W x D x H) mm	660 x 480 x 1355	752 x 572 x 1400	
Weight	Net Weight (Kg.)	65	85	
Refrigerant	Refrigerant	R13	34a	

BLUE STAR WATER COOLERS WITH IN-BUILT UV + RO PURIFICATION.

# PROVEN FILTRATION TECHNIQUES FOR THE PUREST WATER.



#### **Features**



Contamination-free Storage

Food grade SS 304 stainless steel inner tank keeps the storage water contamination-free.



**Cold Water Even Through Power Cuts** 

In-situ PUF insulation not only reduces power consumption but ensures that the water remains cool even through long power failures.



Space Saving

Compact design saves precious real estate.

Blue Star is already a leader in the storage water cooler market, and we now bring you storage water coolers with an in-built UV+RO purification. These are proven to be effective in killing harmful bacteria and microbes that may be present in drinking water. At the same time, the treated water retains all its minerals and salts. This is why our water coolers use ultraviolet radiation as a pre-treatment to sterilise and disinfect the water before it is available at the faucet. These coolers also come with a further two-step filtering process that removes physical impurities, colour, organic impurities and chlorine from the water before it is dispensed.

#### **UNBEATABLE FEATURES AND BENEFITS**



#### Reliability

Reciprocating compressor can operate under tough ambient conditions for long hours. And in case of failure, it can be repaired in most cases thus lowering maintenance costs.



#### Ease of Service

Thoughtfully designed so that all important components are individually and separately accessible for easy service and maintenance.



#### **RO Purification**

RO filters using robust and reliable technology ensure contamination—free, safe drinking water.



#### 7 Stages of Filtration

Besides RO, various other filters ensure clean, odourless, tasty and cool drinking water



#### Fully Automatic

Starts or stops when the tank is half empty or full.



#### Faster Cooling

Efficient design, including rectangular tank and forced fin and tube condenser, maximises heat transfer and ensures faster cooling.



#### **Lower Power Consumption**

Consumes less power as compared to equivalent models due to its smart design.



#### **High Throughput**


Large tank and overall system designed for high consumption volumes.



#### Longer Life

Non-corrosive SS outer body ensures longer life, brighter look and smoother finish, while rugged plastic legs reduce corrosion of base.

#### UNIQUE 7-STAGE PURIFICATION PROCESS

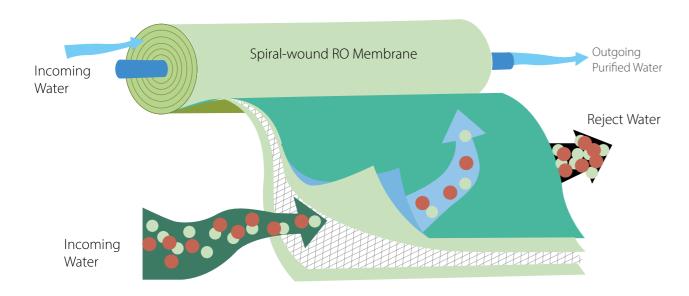

- Unique polypropylene yarn candle to remove physical impurities from input water
- Specially treated pre-carbon block for absorbing colour, organic impurities and chlorine
- Anti-scalant filters to prevent deposits over the RO membrane
- · The sediment filter traps all the fine sediments present in the input water
- RO membrane filter (porosity of .0001 micron) strains micro-organisms and TDS from the input water
- Post-carbon filter to enhance the taste of purified water
- Nano-silver leaching effectively prevents microbial contamination in the storage tank

	Storage Water Cooler with UV+RO Purification		
	Description	SWCSDLX6080UVR0E	
	Storage Capacity (up to float valve level)	80 Ltr.	
	Capacity with Comfort Level Water Outlet Temp at 17°C ± 1°C at Rated Condition	60 LPH	
	Running Current In AMPS (max) at Rated Condition	4.5 ± 10%	
	Power in Watts (max) at Rated Condition	700 ± 10%	
Performance Parameters	Operating Power Supply	230 ± 10% V AC, 50Hz, 1 PH	
	Thermal Insulation for Storage Tank	PUF	
	No. of Faucets	2	
	No. of Cold Water Faucets	2	
	No. of Normal Water Faucets	NA	
	No. of Stages for Filter cum Purifier	7	
	1st stage of Purification	Sediment purification	
	2nd stage of Purification	Carbon block purification	
	3rd stage of Purification	Anti-scalant purification	
Filtration Stages	4th stage of Purification	Sediment purification	
	5th stage of Purification	Reverse Osmosis membrane purification (2 per circuit)	
	6th stage of Purification	Post-carbon block filtration	
	7th stage of Purification	Nano-silver leaching filtration	
	UV Purification	Yes	
	RO Membrane Rating	4 x 75 GPD or equivalent	
	% of Purified Water Recovery	25%, 50 LPH	
	% Rejection of TDS	75%	
RO System	Operating Temperature	15° C to 45° C	
	RO Membrane Flushing	Auto-flush at every start, every stop and every one hour for 1 minute	
	RO System & Water Cooler Operating Voltage	180 – 250V	
	Storage Tank Material	SS304	
Body	Outer Body Material	SS304	
	Type of Product Construction	Concealed	
	Type of Installation	Indoor	
Dimensions and Net Weight	Dimensions (W x D x H ) mm	660x480x1355	
	Net Weight (Kg)	73	
Refrigerant	Refrigerant	R134a	

BLUE STAR BOTTLED WATER DISPENSER – GA SERIES.

# THREE DIFFERENT WATER TEMPERATURES. ONE DISPENSER.

Blue Star Bottled Water Dispensers serve pure and clean water at the temperature you want. Perfect for when you want a hot cup of tea, a refreshing glass of lemonade or a plain glass of water. Apart from being hygienic, these dispensers are very easy to maintain. And are backed by an efficient national sales and service network.







Stainless steel tank for corrosion resistance and better hygiene



Low power consumption



Long-lasting plastic front panel and faucets



Bimetal sensors to ensure protection against overheating



Conveniently removable drip tray



Quiet operation



Tropicalised for efficient cooling even in hot Indian conditions

Description		Table Top	Floor Mounted	Floor Mounted
Model		BWD3TTGA	BWD3FMCGA	BWD3FMRGA
	Function	Dispense Hot/Cold/ Ambient Water	Dispense Hot/Cold/ Ambient Water	Dispense Hot/Cold/ Ambient Water
Deefeesses Deesess	Display	LED	LED	LED
Performance Parameters	Refrigerator Capacity (ltr.)	N.A.	Only Storage Non- refrigerated 15 ltr.	Refrigerated 15 ltr.
	Voltage / Frequency / Phase	230 50 Hz / Single	230 / 50 Hz Single	230V/50 Hz / Single
	Cold Tank Specification	SS304 Food Grade	SS304 Food Grade	SS304 Food Grade
	Storage Capacity (Itr.)	3.2 ltr.	3.2 ltr.	3.2 ltr.
	Cooling Capacity (ltr./hr.) at 12°C Discharge	2.5 ltr./hr.	2.5 ltr./hr.	2.5 ltr./hr.
Features	Power Consumption (Watt) ~ Cooling	120 W	120 W	120 W
1 Guidi Go	Heating Capacity (ltr./hr.) at 85°C Discharge	5 ltr./hr.	5 ltr./hr.	5 ltr./hr.
	Power Consumption (Watt) ~ Heating	500 W	500 W	500 W
	Faucet Type	Push Type/Child Lock for Hot Tap	Push Type/Child Lock for Hot Tap	Push Type/Child Lock for Hot Tap
Dimensions & Net Weight	Dimension (WXDXH) mm	310 X 345 X 490 mm	310 X 345 X 940 mm	310 X 345 X 940 mm
	Net Weight (kg)	11.6	14.2	16.5
Refrigerant		R134a	R134a	R134a



#### BLUE STAR BOTTLED WATER DISPENSER – UA SERIES.

# HOT, COLD OR NORMAL, AS PER YOUR NEED.



The Blue Star range of bottled water dispensers offer pure water at any temperature you want: hot, cold or normal. Apart from being hygienic, these dispensers are easy to maintain and come with the support of an efficient national sales and service network. The best thing is their price; they are truly affordable. So whether you want water for a cup of hot tea, a glass of refreshing lemonade or just plain water, you can now get it with great ease.

#### **Features**



Stainless steel tank for corrosion-resistance and better hygiene



**Function indicating LEDs** 



Child lock for hot water faucet



Quiet operation



Conveniently removable drip tray



Tropicalised for efficient cooling in harsh Indian conditions



Sturdy compressor for trouble-free operation



Eco-friendly refrigerant (R134a)

Model Type	BWD3TTUA	BWD3FMUA	BWD3FMCUA	BWD3FMRUA
Display	LED	LED	LED	LED
Refrigerator/ Cabinet Capacity (Ltr.)	NA	NA	20 Ltr	20 Ltr
Voltage / Frequency / Phase	230V / 50Hz 1Ph	230V / 50Hz 1Ph	230V / 50Hz 1Ph	230V / 50Hz / 1Ph
Tank Specification	SS 304 Food Grade			
Cooling Storage Capacity (Ltr.)	3	3	3	3
Cooling Capacity (Ltr. / Hour)	2.5	2.5	2.5	2.5
Power Consumption (Watt) – Cooling	120 W	120 W	120 W	120 W
Hot Tank Storage Capacity (Ltr.)	0.9	0.9	0.9	0.9
Heating Capacity (Ltr. / Hour)	5	5	5	5
Power Consumption (Watt) Heating	580 W	580 W	580 W	580 W
Drip Tray	Yes	Yes	Yes	Yes
Faucet Type	Push Type/Child Lock for Hot Tap			
No. of Faucets	3	3	3	3
Refrigerant	R134a	R134a	R134a	R134a
Dimensions (WxDxH) mm	320 x 390 x 510	320 x 360 x 1000	320 x 360 x 1000	320 x 390 x 1000
Net Weight (Kg)	12.2	16.5	16.5	17.5
Body Colour	White	White	White	White

#### BLUE STAR BOTTLED WATER DISPENSER – ECO SERIES.

# ABSOLUTELY LIGHT ON YOUR FINANCES.



The Eco model of bottled water dispenser is the lowest priced and can be customised to match the colour of your brand. This will help increase your brand recall among your customers. It comes with three faucets for dispensing hot, cold, and normal water. The water dispenser is hygienic and easy to maintain and is easy on your pockets. It is backed up by our gold standard service network that is present across India.

#### Features



Durable & long lasting



Stainless steel tank for corrosion resistance



Customised colour options as per the brand's choice



Conveniently removable drip tray



Dispenses hot, cold, and normal water



Tropicalised for efficient cooling even in hot Indian conditions



Low power consumption



**Quiet operations** 

Model	BWD3FMGECO		
Туре	Dispenses Hot/ Cold/ Ambient water		
Display	LED		
Voltage / Frequency / Phase	230V / 50Hz / 1Ph		
Tank Specification	SS 304 Food Grade		
Cooling Storage Capacity (Ltr.)	3.2		
Cooling Capacity (Ltr. / Hour) at 12°C Discharge	2.5		
Power Consumption (Watt) ~ Cooling	120		
Hot tank Storage Capacity (Ltr.)	0.9		
Heating Capacity (Ltr. / Hour) at 83°C Discharge	5		
Power Consumption (Watt) ~ Heating	580		
Drip tray	Yes		
Faucet Type	Push Type/Child Lock for Hot Tap		
No. of Faucets	3		
Refrigerant	R134a		
Dimensions (W x D x H) mm	270 x 310 x 870		
Net weight (Kg)	11		
Body Colour	White		

#### BLUE STAR BOTTOM-LOADING WATER DISPENSER.

# ENDS THE STRUGGLE ONCE AND FOR ALL.



Lifting heavy water cans every time the water dispenser needs refilling is a bother no matter who does it. The new Blue Star Bottom—Loading Water Dispensers offer convenient loading where the can may be effortlessly slid into the slot. Apart from this convenience, these dispensers are also stylish and compact, making them the perfect match for your interiors.

#### Features



Bottom-loading design



Child safety lock



Get water at hot, cold and room temperature



High-efficiency compressor



Durable stainless steel water tank



Space-saving and minimalist design

DESCRIPTION	PERFORMANCE PARAMETERS	COOLING FEATURES		HEATING FEATURES		OTHER FEATURES			DIMENSIO NET W			
Model	Tank Specification	Cooling Storage Capacity (Ltrs.)	Cooling Capacity (Ltr./Hour) at 12°C Discharge	Power Consumption (Watt)	Hot Tank Storage Capacity (Ltrs.)	Heating Capacity (Ltr./Hour) at 83°C Discharge	Power Consumption (Watt)	Faucet Type	No. of Faucets	Refrigerant	Dimensions (WxDxH)	Net Weight (Kg)
BDHPCF1	SS 304 Food Grade	1.5	2	90W	1	4	420	Push Type	1	R134a	310x360 x1040	17



### SEPRATER-02

# BLUE STAR HARD TOP DEEP FREEZER. STAY FRESH. STAY COMPACT.

Blue Star offers a compact hard top deep freezer that is ideal for domestic or commercial use. It comes with a star rating that ensures its energy saving capabilities. Manufactured in our world-class state of the art factory, this product is made in India in every sense of the word.



#### Features



Wide Range – Elegant Control Panel Smart eye and Square design with LED light.



Compact machine Ideal for small storage.



Super Tropicalised Designed to work even in 47°C ambient summer conditions.



Plastic Baskets Long-lasting, corrosion-free, food-grade.



Quadracool Technology
Ensures even and optimum cooling from four sides.



Robust Construction For long life.

Model	Unit	CF2-90NEYW	CF3-130NEYW	CF4-180NEYW	CF4-230NEYW
Star Rating		2	3	4	4
Gross Capacity	L	71	108	161	215
Temperature Range		8°C to -26°C	8°C to -26°C	8°C to -26°C	8°C to -26°C
Refrigerant		R600a	R600a	R600a	R600a
No. of Lids		1	1	1	1
Inner Cabinet		Embossed	Embossed	Embossed	Embossed
PUF Thickness	mm	60	60	60	60
Overall Dimensions (WXDXH)	mm	505 X 570 X 829	575 X 570 X 829	765 X 570 X 842	955 X 571 X 842
Overall Dimensions (WXDXH)	Inch	20 X 22 X 33	23 X 22 X 33	30 X 22 X 33	38 X 22 X 33
Net Weight	Кд	25	28	31	35
Baskets- Plastic		1	1	1	1



# BLUE STAR HARD TOP DEEP FREEZER. LONG-LASTING FRESHNESS WITH ENERGY SAVINGS.



Our range of hardtop deep freezers are built using cutting-edge technology and come with the most innovative features. They not only provide long-lasting freshness but also deliver consistent performance in the high sub-continental

temperatures. They also lower your power bills and make for the most effective and economical solutions for food storage.



#### Features



Wide Range –
Elegant Control Panel
Smart Eye and Burj design, can work as
Freezer or Cooler as per need.



Curvaceous Door Design With Built-In Crescent Handle Ensures zero cooling loss while providing ease of opening from any angle.



High Density PUF Insulation For better holding time.



Frosted Inner Lid

Avoid condensed water flow into the machine.



Multi-Angle Hinge Design Door lid can be opened from 45° to 75° and has a soft closing mechanism.



Antibacterial Gasket Removable gasket with silver ions offers greater food-safety assurance.

Model	Unit	CF5-330NEYW/NPYW	CF5-396NEYW/NPYW	CF5-460NEYW/NPYW	CF5-575NEYW/NPYW
Star Rating		5	5	5	5
Gross Capacity	L	310	360	410	515
Temperature Range		8°C to -26°C	8°C to -26°C	8°C to -26°C	8°C to -26°C
Refrigerant		R290	R290	R290	R290
No. of Lids		2	2	2	2
Inner Cabinet		Embossed	Embossed	Embossed	Embossed
PUF Thickness	mm	65	65	65	65
Overall Dimensions (WXDXH)	mm	1122 X 708 X 883	1262 X 708 X 883	1407 X 708 X 883	1697 X 708 X 883
Overall Dimensions (WXDXH)	Inch	44 X 28 X 35	50 X 28 X 35	55 X 28 X 35	67 X 28 X 35
Net Weight	Kg	49/50	54/55	57/58	63/64
Basket - Metal		1	1	1	1

# BLUE STAR HARD TOP DEEP FREEZER. UNMATCHED COOLING PERFORMANCE.

Blue Star's Deep Freezers are the most effective and economical for safe storage of perishable foods. The range of Hard-top Deep Freezers from Blue Star incorporate cutting-edge technology and innovative features, guaranteeing long-lasting freshness. Built to last and to meet the demands of the high sub-continental temperatures, these machines cut power bills through energy-saving innovations thus, helping your business grow.







Antibacterial Gasket
Removable gasket with silver ions offers
greater food-safety assurance.

Convertible Cooling Technology

Can work as Freezer or Cooler as per need.



Corrosion Resistant Body Anti-corrosive body, embossed metal surface finish and long product life.



Robust Construction For long life.



Highly Energy-Efficient Compressor

Model	Unit	CF3-300MEW-SD/MPW-SD	CF3-300MEW/MPW	CF3-400MEW/MPW	CF3-500MEW/MPW
Star Rating		3	3	3	3
Gross Capacity	L	301	301	401	484
Temperature Range		8°C to -26°C	8°C to -26°C	8°C to -26°C	8°C to -26°C
Refrigerant		R290	R290	R290	R290
No. of Lids		1	2	2	2
Inner Cabinet		Embossed/ Plain Sheet	Embossed/ Plain Sheet	Embossed/ Plain Sheet	Embossed/ Plain Sheet
PUF Thickness	mm	60	60	60	60
Overall Dimensions (WXDXH)	mm	1147 x 678 x 857	1147 x 678 x 857	1447 x 678 x 857	1647 x 678 x 857
Overall Dimensions (WXDXH)	Inch	45 X 27 X 34	45 X 27 X 34	57 X 27 X 34	65 X 27 X 34
Net Weight	Кд	46 / 47	47 / 49	56 / 58	61 / 63
Basket - Metal		1	1	1	1

# BLUE STAR GLASS TOP DEEP FREEZER. SUPER-FREEZING MARVEL.



Blue Star's Compact Glass Top Deep Freezer is the perfect choice in a domestic or commercial setting. It provides optimal storage space and Low E-Toughened glass that seamlessly displays products. It is available in multiple colours and also comes with a star rating that ensures its energy saving capabilities. Manufactured in our world-class state of the art factory, this product is truly Indian at heart.

#### Features



Optimised Storage Space Industry-leading cooling, maximises display. Scooping depth for candy cones, boosting profits with increased storage capacity.



Super Tropicalised Designed to work even in 47°C ambient summer conditions.



Low E-Toughened Glass Reflective glass for high performance and better visibility.



Maximum Frontal Branding Area
Temperature controller on side grill ensures
100% space for branding on the front.



Multi-Colour Frame Options
Allows for customisation to enhance brand display and awareness.



Plastic Baskets Long-lasting, corrosion-free, food-grade.

Model	Unit	GT5-130NP	GT5-180NP	GT5-230NP
Star Rating		5	5	5
Gross Capacity	L	108	161	215
Temperature Range		−13°C to −26°C	−13°C to −26°C	−13°C to −26°C
Refrigerant		R600a	R600a	R600a
No. of Lids		2	2	2
Inner Cabinet		Embossed	Embossed	Embossed
PUF Thickness	mm	60	60	60
Overall Dimensions (WXDXH)	mm	577 X 527 X 810	767 X 527 X 810	957 X 527 X 810
Overall Dimensions (WXDXH)	Inch	23 X 21 X 32	30 X 21 X 32	38 X 21 X 32
Net Weight	Kg	29	32	37
Baskets- Plastic		1	1	2

# BLUE STAR GLASS TOP DEEP FREEZER. BETTER MERCHENDISING. ENHANCES IMPULSE.

Our Glass Top Deep Freezers let you display frozen foods in an attractive manner, leading impulse purchases and greatly improving sales. Also available with glasstop sliding doors, these freezers are energy-efficient and economical. Selected models comes with LED\* and offer a range of colors to cater to diverse customer preferences.



#### **Features**



#### Optimised Storage Space

Industry-leading cooling, maximises display. Scooping depth for candy cones, boosting profits with increased storage capacity.



High Density PUF Insulation For better holding time.



Maximum Frontal Branding Area
Temperature controller on side grill
ensures 100% space for branding on the front.



#### Crown Design

Looks premium and has a robust frame design.



Plastic Basket

Long-lasting, corrosion-free, food-grade.



#### Multi-Colour Frame Options

Allows for customisation to enhance brand display and awareness.

Model	Unit	GT5-350N/NP	GT5-410N/NP	GT5-475N/NP	GT5-590N/NP
Star Rating		5	5	5	5
Gross Capacity	L	315	365	421	530
Temperature Range		-13°C to -26°C	-13°C to -26°C	-13°C to -26°C	-13°C to -26°C
Refrigerant		R290	R290	R290	R290
No. of Lids		2	2	2	2
Inner Cabinet		Embossed	Embossed	Embossed	Embossed
PUF Thickness	mm	65	65	65	65
Overall Dimensions (WXDXH)	mm	1125 X 670 X 859	1265 X 670 X 859	1410 X 670 X 859	1700 X 670 X 859
Overall Dimensions (WXDXH)	Inch	44 X 26 X 34	50 X 26 X 34	56 X 26 X 34	67 X 26 X 34
Net Weight	Kg	52/55	56/58	60/64	68/72
Baskets- Metal/Plastic		4/4	4/5	6/6	6/6

<sup>\*</sup>LED light option available only in NL/ NPL Versions

#### BLUE STAR CHEST COOLER. **QUICK COOLING** FOR QUICK PROFITS.

Blue Star Chest Coolers are meant for super-fast temperature pull-down of soft drinks, milk and beverages in harsh summer conditions. This makes them perfect for commercial businesses like restaurants, hotels, dairy and fast food outlets. They are equipped with efficient compressor and new gen technology to ensure energy savings and are exactly what you need to keep the cool in your business.



#### Features



Faster Temperature Pull-Down



**Energy-Efficient Compressor** For Savings In Electricity Bills



**High Density Puf Insulation** For Longer Cooling Retention



Tropicalised For Harsh **Indian Summers** 



Multi-Angle Hinge Design For **Effortless Operation** 



Safe Closure With Lock And Key

Description	Unit	СНВКЗООМР	СНВК400МР	СНВК500МР
Gross Capacity	Ltr	301	401	484
Temperature Range		2ºC to 8ºC	2ºC to 8ºC	2ºC to 8ºC
Refrigerant		R134a	R134a	R134a
No of Lids		1	2	2
Inner Cabinet		Embossed	Embossed	Embossed
PUF Thickness	mm	60	60	60
Overall Dimensions (WxDxH)	mm	1147 x 678 x 857	1447 x 678 x 857	1647 x 678 x 857
Overall Dimensions (WxDxH)	Inch	45 X 27 X34	57 X 27 X34	65 X 27 X34
Net Weight	kg	55	65	73



## BLUE STAR COOLER CUM FREEZER. MULTIPLE NEEDS. SINGLE SOLUTION.

-1110

The Blue Star Cooler-cum-Freezer is just what you need when you have to store a variety of frozen food and chilled drinks in one single unit. By combining two machines in one, it saves space and lowers capital investment as well as operating costs. In other words, the Blue Star Cooler-cum-Freezer is a great example of how two halves can add up to a lot more.



#### Features



Dual compartment machine configured as freezer in one and cooler in the other



Two separate lids ensure independent access to freezer and cooler chambers



Easy to clean and maintain hygiene



**Excellent Drain Design** 



Versatile wheels for easy movement and placement of unit



Fast Freeze Mode

Model Name	Unit	CHFK275DGS/-B/-G	CHFK350DGS	CHFK400DGS	CHFK500DGS
Cooler Capacity	Ltr	105	150	148	162
Freezer Capacity	Ltr	139	185	217	319
Total Capacity	Ltr	244	335	365	481
Temperature Range – Cooler	oC.	2ºC to 8ºC	2ºC to 8ºC	2ºC to 8ºC	2ºC to 8ºC
Temperature Range – Freezer	oC.	-18°C to -22°C	-18°C to -22°C	-18°C to -22°C	–18°C to –22°C
Refrigerant		R600a	R290	R290	R290
Overall Dimensions (WxDxH)	mm	1069 X 599 X 860	1336 X 665 X 865	1355 X 770 X 880	1535 X 845 X 915
Overall Dimensions (WxDxH)	Inch	42 X 24 X 34	53 X 26 X 34	53 X 30 X 35	60 X 33 X 36
Net Weight	kg	44	52	61	70

## SEPRATER-03

BLUE STAR VISI COOLERS.

## EXHIBIT YOUR PRODUCTS. ELEVATE YOUR PROFITS.



There is no smarter way to preserve and display your products at the same time. Blue Star's vertical storage Visi Coolers are specially designed to cool products uniformly and meet the demands of commercial businesses such as supermarkets, departmental stores, kirana stores and restaurants. So, while their heavy-duty compressors cool quickly even in harsh Indian summers, the ample visibility of your products ensures quick profits too.

#### **Features**



Ideal for harsh Indian summers



Clear product visibility with reflective glass



Adjustable shelves



Thermostat for accurate temperature control



Energy efficient cooling unit



Quick cooling



Back-lit canopy option for merchandising



Eco-friendly refrigerant



Self-closing door with locking facility



Uniform cooling

#### **Technical Specification**

VISI COOLERS – A SERIES										
Description	Units	VC95A	VC150A	VC190A	VC290A	VC400A				
Gross Capacity	L	95	140	165	285	385				
Temperature		+1°C to +10°C								
Power Supply		220V/1Ph/50Hz	220V/1Ph/50Hz	220V/1Ph/50Hz	220V/1Ph/50Hz	220V/1Ph/50Hz				
Refrigerant		R600a	R600a	R600a	R600a	R600a				
No. of Doors	Nos	1	1	1	1	1				
Provision for Locking		Available	Available	Available	Available	Available				
Overall Dimensions (including hinge, castor etc)	mm	470x535x972	470x535x1177	500x578x1520	560x618x1815	645x618x2070				
Net Weight	kg	30.5	35.5	46	59	68				
No. of Shelves	Nos	Wire /2	Wire /3	Wire /3	Wire /3	Wire /4				

VISI COOLERS – D SERIES									
Description	Units	VC65D	VC250D	VC325D	VC590D				
Gross Capacity	L	55	220	300	530				
Temperature		0°C to +10°C	+2°C to +8°C	+2°C to +8°C	+2°C to +8°C				
Power Supply		230V/1Ph/50Hz	230V/1Ph/50Hz	230V/1Ph/50Hz	230V/1Ph/50Hz				
Refrigerant		R600a	R600a	R600a	R290				
No. of Doors	Nos	1	1	1	2				
Provision for Locking		Available	Available	Available	Available				
Overall Dimensions (including hinge, castor etc)	mm	445x510x501	535 x 520 x 1735	615 x 610 x 1790	1000 x 580 x 1855				
Net Weight	kg	19	61	64	115				
No. of Shelves	Nos	Wire /3	Wire /4	Wire /4	Wire /4				

#### BLUE STAR VISI COOLERS.

#### THREE DOORS TO BIGGER PROFITS.



Blue Star presents a range of Visi Coolers (C Series) with three doors for the first time. They are high on performance and perfect for heavy—duty applications. Equipped with a ventilated cooling mechanism that ensures both fast and uniform cooling, these Visi Coolers make sure every shelf and every corner is just as cold as the other.

There is no smarter way to preserve and display your products at the same time. The C Series Visi Coolers meet the demands of commercial businesses such as supermarkets, departmental stores, general stores and restaurants.

And while their heavy—duty compressors cool quickly even in harsh Indian summers, the ample visibility of your

#### **Features**



Uniform cooling

products ensures quick profits as well.



Heavy-duty compressor



Digital controller for temperature display



Locking facility in all models

BLUE STAR



Clear product visibility with reflective glass



LED lighting



Self-closing doors



Eco-friendly refrigerant

Description	Units	VC600CD VC600CD-B	VC800CD-B	VC1200CD VC1200CD-B
Gross Capacity	L	568L	730L	1075L
Temperature		+1°C to +10°C	+1°C to +10°C	+1°C to +10°C
Power Supply		220V/50Hz/1Ph	220V/50Hz/1Ph	220V/50Hz/1Ph
Refrigerant		R290	R290	R290
No. of Doors	Nos.	2	2	3
Provision for Locking		Available	Available	Available
Digital Controller		Available	Available	Available
Overall Dimensions (including hinge, castor etc)	mm	880x610x1973	1120x610x1973	1600x610x1973
Net Weight	kg	96.5	113	157
No. of Shelves	Nos.	Wire /8	Wire /8	Wire /12

#### BLUE STAR SUPER COOLERS.

## YOUR SEARCH FOR UNIFORM COOLING ENDS HERE.

BLUE STAR  Blue Star presents a range of super coolers that are high on performance and perfect for heavy-duty applications. Equipped with a ventilated cooling mechanism that ensures both fast and uniform cooling, these Visi Coolers make sure every shelf and every corner is just as cold as the other.

#### Featu**Fea**tures



Pre-coated metallic inner and outer cabinet for durability and enhanced cooling



Tropicalised for harsh Indian weather conditions



Castor wheels for easy movement



Corrosion-free aluminium door frame



LED lighting for better visibility



Self-closing doors

BLUE STAR



Adjustable shelves



Locks in all models



Eco-friendly refrigerant (R134a)

Description	Units	SC300F	9C375F	SC500F	SC650F	SC1000F
Gross Capacity	L	285	358	448	595	947
Temperature		+2°C to +10°C				
Power Supply		220V/50Hz/1Ph	220V/50Hz/1Ph	220V/50Hz/1Ph	220V/50Hz/1Ph	220V/50Hz/1Ph
Refrigerant		R134a	R134a	R134a	R134a	R134a
No. of Doors	Nos.	1	1	1	1	2
Provision for Locking		Available	Available	Available	Available	Available
Overall Dimensions (including hinge, castor etc.)	mm	576x686x1454	576x686x1724	576x686x2055	739x686x2063	1025x781x2030
Net Weight	kg	71	81	96	108	171
No. of Shelves	Nos.	Wire /4	Wire /5	Wire /5	Wire /5	Wire /10

## BLUE STAR TROPICAL COOLERS. COPPER IN ITS DNA. DURABILITY IN ITS GENES.



The new range of tropical coolers from Blue Star helps in adding premium look to your store, while displaying the products in the most aesthetical manner. Equipped with copper condenser and evaporator, these tropical coolers are the sturdiest and the most efficient. The ventilated cooling mechanism ensures the uniform and faster cooling, so that every shelf and every corner is just as cold as the other. These are the smartest choice for harsh tropical summers in India. The clear reflective glass along with the LED Lighting increases the visibility of the product, thus ensuring more sales and more profit for your business.



#### **Features**



Heavy duty copper condenser and evaporator



LED lighting for better visibility



Digital temperature display



Tropicalised for harsh Indian summers



Ventilated Model with uniform cooling



Adjustable shelves

Description	Units	TC290V	TC330V	TC450V	TC550V	TC590V	TC710V	TC1050V	TC1250V
Gross Capacity	L	235	305	400	475	525	625	1002	1150
Temperature					+2°C †ı	o +10°C			
Power Supply					230V/5	OHz/1Ph			
Refrigerant					R1	34a			
No. of Doors	Nos.	1	1	1	1	1	1	2	2
Overall Dimensions (including hinge, castor etc)	mm	500*660*1448	514*660*1725	583*715*1792	583*715*2053	640*715*2053	640*785*2135	1050*785*2200	1152*785*2188
Net Weight	kg	72	63	96	102	108	117	143	180
No. of Shelves	Nos.	3	4	5	5	5	5	10	10
Canopy		No	Yes	Yes	Yes	Yes	Yes	Yes	Yes
No. of PET Bottles (500 ml)	Nos.	126	144	196	245	280	320	476	560
Copper Cond and Evap.		No	No	No	No	Yes	Yes	Yes	Yes
Digital Display		No	Yes	Yes	Yes	Yes	Yes	Yes	Yes

## BLUE STAR VISI FREEZERS. MAXIMUM DISPLAY, MINIMUM FLOOR SPACE.

BLUE STAR

Blue Star Visi Freezers are designed to preserve ice-cream and frozen food with maximum display at minimum floor space. The freezers aesthetically suit the store layouts and help in business enhancement and profitability. Fitted with heavy—duty compressors which delivers faster freezing and designed to perform in harsh Indian summer. Adjustable shelves in the freezers provide flexible storage for merchandising.

#### **Features**



Ventilated system for uniform freezing



Canopy with LED

BLUE STAR



Glass with heater for better visibility



Copper evaporator



Digital temperature controller



Castor wheels with brakes



Adjustable shelves for flexible storage



Self-closing door



Auto-defrost



Eco-friendly refrigerant - R290

Description	VF450CD	
Gross Capacity (litres)	400	
Temperature	−18°C to −22°C	
Power Supply	230V/50Hz/1Ph	
Refrigerant	R290	
No. of Doors	1	
Lock with Key	Available	
Digital Controller	Available	
Product Dimensions (mm)	670 x 693 x 2008	
Net Weight (kg)	110	
No. of Shelves	Wire /5	

## SEPRATER-04

## BLUE STAR MINIBAR. SMALL ON SIZE, BIG ON STORAGE.

Blue Star brings to you the Minibar – Graphite Series, an eco-friendly solution that also gives you the added advantage of compactness. Equipped with a large storage space and a highly efficient cooling system, it also comes with an in-built freezer compartment for your ice cube needs. There is even a door that can be positioned either on the right or left for your convenience. Available in multiple colour options, this unit makes preserving food and chilling beverages a style statement.



#### Features



Temperature control dial with 'off' button



Reversible door



LED light for enhanced visibility



Eco-friendly R600a refrigerant to ensure a low carbon footprint



Silent operations



Extra space for storing 2 litre bottle



Available in multiple colours

Model No.	MR60-GB	MR60-GG	MR70-GB
Model Name	Mini Bar Graphite 50L – Black	Mini Bar Graphite 50L – Grey	Mini Bar Graphite 52L – Black
Gross Capacity (litres)	47	47	47
Power Supply	230V/ 50Hz/ 1Ph	230V/ 50Hz/ 1Ph	230V/ 50Hz/ 1Ph
Refrigerant	R600a	R600a	R600a
No. of Doors	1	1	1
Overall Dimensions (mm)	445x470x500	445x470x500	450x470x500
Net Weight (kg)	16	16	15
No. of Shelves	1	1	1
Freezer Box	Yes	Yes	No

## SEPRATER-05

#### BLUE STAR REACH-IN CHILLERS & FREEZERS.

#### **EASY STORAGE MEETS ACCURATE TEMPERATURE CONTROL.**



#### **Features**



Tropicalised for high ambient temperatures



Food grade stainless steel unit



Uniform cooling by



forced air circulation



Adjustable tray slides



Rounded corners

Eco-friendly

refrigerant

**Odourless operation** 

due to continuous

Self-closing doors

air circulation



**Auto defrost** 





**LED Light** 



for visibility



Removable gasket for easy cleaning

surface. These units can also be offered with the option of SS shelves.

#### **Technical Specification**

Reach-in Freezers								
Description	RF2D700GP	RF4D1450GP	RF2D700GC	RF4D1450GC	RF2D550N*	RF4D1100N*		
Capacity (Ltrs)	650	1350	650	1350	600	1200		
Temperature Range	-20° to -7°C	-20º to -7ºC	-20º to -7ºC	-20º to -7ºC	−18º to −10°C	-18º to -10ºC		
No. of Doors	2	4	2	4	2	4		
Type of Doors (Int/Ext)	SS-304/201	SS-304/201	SS-201/201	SS-201/201	SS-201/201	SS-201/201		
Shelves Qty	3	6	3	6	3	6		
Light	Yes	Yes	Yes	Yes	No	No		
Refrigerant Gas (Type/Charge)	R290/115g	R290/120g x 2	R290/115g	R290/120g X 2	R290/110g	R290/150g		
Voltage & Frequency (V–Hz)	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz	220/240V-50Hz	220/240V-50Hz		
Power (Watts)	522	950	522	950	400	608		
Current (Amps)	2.6	4.9	2.6	4.9	4.2	8.9		
Defrost	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic		
Temperature Display LED	Yes	Yes	Yes	Yes	Yes	Yes		
External Dimension (W x D X H) mm	700 x 880 x 2043	1400 x 880 x 2043	700 x 880 x 2043	1400 x 880 x 2043	700 x 765 x 1997	1200 x 760 x 1997		
Net Weight (kg)	119	200	119	200	85	90		
Gross Weight (kg)	129	214	129	214	120	130		

Reach-in Chillers								
Description	RC2D700GP	RC4D1450GP	RC2D700GC	RC4D1450C	RC2D550N*	RC4D1100N*		
Capacity (Ltrs)	650	1350	650	1350	600	1200		
Temperature Range	0º to +12ºC	0º to +12ºC	0º to +12ºC	0º to +12ºC	0º to +10ºC	0º to +10ºC		
No. of Doors	2	4	2	4	2	4		
Type of Doors (Int/Ext)	SS-304/201	SS-304/201	SS-201/201	SS-201/201	SS-201/201	SS-201/201		
Shelves Qty	3	6	3	6	3	6		
Light	Yes	Yes	Yes	Yes	No	No		
Refrigerant Gas (Type/Charge)	R290/90g	R290/120g	R290/90g	R290/120g	R290/100g	R290/150g		
Voltage & Frequency (V–Hz)	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz	220/240V-50Hz	220/240V-50Hz		
Power (Watts)	250	600	250	600	300	490		
Current (Amps)	1.3	3.3	1.3	3.3	3.2	5.5		
Defrost	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic		
Temperature Display LED	Yes	Yes	Yes	Yes	Yes	Yes		
External Dimension (W x D X H) mm	700 x 880 x 2043	1400 x 880 x 2043	700 x 880 x 2043	1400 x 880 x 2043	700 x 765 x 1997	1200 x 760 x 1997		
Net Weight (kg)	112	190	112	190	85	90		
Gross Weight (kg)	122	204	122	204	120	130		

<sup>\*</sup>Non GN compatible

#### BLUE STAR UNDER COUNTER CHILLERS & FREEZERS.

#### HIGH PERFORMANCE COMES WITH A HEAVY-DUTY BUILD.



#### **Features**



Tropicalised for high ambient temperatures



**Uniform cooling** by forced air circulation



Digital temperature indicator



**Auto defrost** 



Eco-friendly refrigerant



Self-closing



doors



Adjustable



tray slides



Adjustable feet



Food grade stainless steel



**Odourless operation** due to continuous air circulation



Removable gasket for easy cleaning



Door options: stainless steel / glass

#### **Technical Specification**

Undercounter Chillers									
Description	UC2100GP	UC3100GP	UC2100GC	UC3100GC					
Capacity (Ltrs)	260	400	260	400					
Temperature Range	0º to +12ºC	0º to +12ºC	0º to +12ºC	0º to +12ºC					
No. of Doors	2	3	2	3					
Cabinet and Doors (Int/Ext)	SS-304/201	SS-304/201	SS-201/201	SS-201/201					
Shelves Qty	2	3	2	3					
Gn Pan	GN2/1	GN2/1	GN2/1	GN2/1					
Refrigerant Gas (Type/Charge)	R290/50g	R290/50g	R290/50g	R290/50g					
Voltage supply & Frequency (V-Hz)	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz					
Max Input Power	255W	255W	255W	255W					
Current Amps	1.3	3.3	1.3	3.3					
Defrost	Automatic	Automatic	Automatic	Automatic					
Thermostat	Digital	Digital	Digital	Digital					
External Dimension (W x D X H) mm	1365 x 700 x 850	1805 x 700 x 850	1365 x 700 x 850	1805 x 700 x 850					
Net Weight (kg)	96	116	96	116					
Gross Weight (kg)	115	142	115	142					

Undercounter Freezers									
Description	UF2100GP	UF3100GP	UF2100GC	UF3100GC					
Capacity (Ltrs)	260	400	260	400					
Temperature Range	−20° to −7°C	−20° to −7°C	−20° to −7°C	−20° to −7°C					
No. of Doors	2	3	2	3					
Cabinet and Doors (Int/Ext)	SS-304/201	SS-304/201	SS-201/201	SS-201/201					
Shelves Qty	2	3	2	3					
Gn Pan	GN2/1	GN2/1	GN2/1	GN2/1					
Refrigerant Gas (Type/Charge)	R290/140g	R290/140g	R290/140g	R290/140g					
Voltage supply & Frequency (V–Hz)	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz					
Max Input Power	510W	510W	510W	510W					
Current Amps	2.5A	2.5A	2.5A	2.5A					
Defrost	Automatic	Automatic	Automatic	Automatic					
Thermostat	Digital	Digital	Digital	Digital					
External Dimension (W x D X H) mm	1365 x 700 x 850	1805 x 700 x 850	1365 x 700 x 850	1805 x 700 x 850					
Net Weight (kg)	106	126	106	126					
Gross Weight (kg)	125	152	125	152					

#### BLUE STAR SALADETTES AND SANDWICH STATIONS.

## **EXCEPTIONAL EFFICIENCY AND ROBUST CONSTRUCTION.**



Blue Star now introduces Saladettes and Sandwich Stations to its range of products. They are built from stainless steel on the interior as well as exterior to lend great aesthetic appeal and to differ from other models available in the market. A definite boost to the eatery business!

#### **Features**



Easy serviceability



Curved edge for easy cleaning



High efficiency and functionality



**Automatic defrost** 



Green refrigerant



Adjustable feet



Self-closing doors



Removable gasket



Cyclopentane blowing agent



45mm thick insulation



Digital temperature control

Salac	dettes and Sandwich Stations	
Description	SC2100GA	SC3100GA
Capacity (Ltrs)	260	400
No. of Doors (Nos.)	2	3
Type of Doors (Int/Ext)	SS-201/201	SS-201/201
Temperature Range °C	2º to +8ºC	2º to +8ºC
Shelves Qty (Nos.)	2	3
Gn Pan	GN2/1	GN2/1
Toppings Pan Slot	YES	YES
Refrigerant Gas (Type/Charge)	R290/55g	R290/60g
Voltage supply & Frequency (V–Hz)	220-240V/50Hz	220-240V/50Hz
Max Input Power	143W	152W
Current Amps	1.1A	1.5A
Defrost	Automatic	Automatic
Thermostat	Digital	Digital
External Dimension (W x D X H) mm	900 x 700 x 990	1365 x 700 x 990
Net Weight (kg)	72	110
Gross Weight (kg)	83	130

BLUE STAR BLAST FREEZERS.

## RAPID COOLING SOLUTIONS FOR PRESERVING FOOD QUALITY.

Blue Star offers a new range of Blast Freezers ideal for extremely fast chilling needs. These freezers help Eliminate contamination from bacteria and maintain the quality of food products. A must-have product for any Kitchen, they also prevent any weight loss of food products.

#### **Features**



Internal /external construction made of stainless steel AISI 304



Electronic temperature display



Tropicalised for Indian conditions



High performance



Automatic defrosting system with pause



Time and probe based chiller and freezer temperature setting

	Blast Chillers & F	reezers		
Description	BF05G	BF10G	BF15G	
Cooling Type	Chiller & Freezer	Chiller & Freezer	Chiller & Freezer	
Chilling Volume (Kg)	18	34	50	
Freezing Volume (Kg)	11	22	38	
Phase	Single	Single	Three	
Chilling Temp °C	+90°C / +3°C	+90°C / +3°C	+90°C / +3°C	
Freezing Temp °C	+90°C / -33°C	+90°C / -33°C	+90°C / -33°C	
Prop	1 Nos.	1 Nos.	1 Nos.	
Defrost	Automatic	Automatic	Automatic	
Temperature Display	Digital	Digital	Digital	
Door	Solid Door	Solid Door	Solid Door	
Voltage Supply & Frequency (V – Hz)	230V/50Hz	230V/50Hz	400V/50Hz	
Max Input Power	1185W	2010W	3820W	
Refrigerant Gas (Type/Charge)	R404a/850G	R404a/1600G	R404a/2400G	
Shelf	5 Gn1/1	10 Gn1/1	15 Gn1/1	
External Dimension (W x D x H) mm	800 x 700 x 900	800 x 780 x 1700	800 x 780 x 2000	
Net Weight (Kg)	92	145	175	
Gross Weight (Kg)	112	168	185	



#### BLUE STAR BACK BAR CHILLER.

## OUTSTANDING VISIBILITY WITH SPACE-SAVING DESIGN.

Blue Star offers Back Bar Chiller options that can be used at any bar, club and/or restaurant. With glass doors, they provide excellent visibility and are designed to save space. Storage in these chillers ensures areat preservation and convenient, readv—to—serve drinks.

#### **Features**



Self-closing doors



Digital temperature control



Internal LED light for better visibility



Replaceable gasket



Lock fitted as standard



Adjustable shelves and feet



Safety tempered glass and double glazed doors

	Back Bar Chiller	
Description	BC250A	BC350A
Capacity (Ltrs)	190	320
Cooling Type	Ventilated	Ventilated
No. of Doors (Nos.)	2	3
Type of Doors	Glass Door	Glass Door
Temperature Range °C	1 to +10°C	1 to +10°C
Shelves Qty/Colour/Adjustable	4 / White	6 / White
Refrigerant Gas (Type/Charge)	R600a/70g	R600a/90g
Voltage Supply & Frequency (V – Hz)	220-240V/50Hz	220-240V/50Hz
Max Input Power	210W	345W
Defrost	Automatic	Automatic
External Dimension (W x D x H) mm	900 x 520 x 900	1350 x 520 x 900
Net Weight (Kg)	62	80
Gross Weight (Kg)	65	87.5

BLUE STAR ICE MACHINES.

## ICE OF ANY SHAPE. FOR ANY OCCASION.

TO ARE THE BLUE STAR Blue Star, India's leading air conditioning and refrigeration company, extends its category to bring you sophisticated ice—making machines that freeze water and make ice effectively. These machines are hygienic, energy efficient, durable and easy to maintain. Blue Star uses its expertise and domain knowledge to give you the products as per your needs and requirements. And with its widespread service network you can be sure of long life and optimum performance from your machine.

#### Features



Power saving design



Auto stop and start



Perfectly shaped ice



Equipped with sprayers for easy cleaning



Water content control



Compact design saves space



Stainless steel body for longer life



Designed for noiseless operation

	Ice Machines												
MODEL NAME	ICM-15	ICM-20	ICM-26	ICM-50	ICM-90								
Production in 24hrs	15kg	20kg	26kg	50kg	80kg								
Storage capacity	1.4kg	3.5kg	6kg	10kg	42kg								
Cooling System	Air Cooled												
Type of Ice	Bullet ice	Bullet ice	Bullet ice	Bullet ice	Gourmet								
Mass of Ice	10g	15g	15g 15g		25g								
Refrigerant	R600a	R600a	R600a	R290	R290								
Voltage / Frequency / Phase	220-240V-50Hz/1Ph	220-240V-50Hz/1Ph	220-240V-50H2/1Ph	220-240V-50Hz/1Ph	220-240V-50Hz/1Ph								
Rated Power	126W	178W	250W	295W	670W								
Product Dimension (WxDxH)	420x465x470 mm	440x530x647 mm	470x585x710 mm	570x665x896 mm	780x650x1045 mm								
Net weight	17kg	27kg	33kg	45.5kg	63.5kg								

#### BLUE STAR PASTRY SHOWCASE.

## SO STYLISH IT MAKES THE GOOD EVEN BETTER.

Blue Star's Pastry Showcase suits any environment without compromising on style and display area. Its unique design enhances the appearance of cookies, cakes, brownies, and more items and attracts the eyes of everyone who passes by. The showcase features advanced technology with low emissivity tempered glass for clear product visibility, preventing frost formation.



#### Features



Tempered and low emissivity glass for unlimited visibility



4 Castor wheels, 2 with brakes



3 Nos. glass shelves



Brilliant LED lighting



Ventilated refrigeration for uniform cooling



Available in different sizes (in feet): 3,4,5,6



Consumes less energy



**Elegant finish** 

Description	KORAL O9CSQP	KORAL 12CSQP	KORAL16CSQP	KORAL 18CSQP
Function	Chiller	Chiller	Chiller	Chiller
Structure	Square	Square	Square	Square
Size In Ft	3	4	5	6
Temp Range °C	2ºC to +8ºC	2ºC to +8ºC	2ºC to +8ºC	2ºC to +8ºC
Voltage/frequency	220V~240V~50Hz	220V~240V~50Hz	220V~240V~50Hz	220V~240V~50Hz
Refrigerant	R290	R290	R290	R290
Castor Wheels	Yes	Yes	Yes	Yes
Inner Material	SS-201 - Food Safe			
Shelf Nos.	3	3	3	3
Side Panel	Tempered Glass	Tempered Glass	Tempered Glass	Tempered Glass
Marble Base	Optional	Optional	Optional	Optional
Light	Yes	Yes	Yes	Yes
Dimension (WxDxH) mm	900x750x1200	1200×750×1200	1500×750×1200	1800×750×1200
Weight In Kg	130	167	204	240

## SEPRATER-06

BLUE STAR MULTI-DECK CHILLERS & FREEZERS WITH GLASS DOOR - PLUG IN.


MAXIMUM DISPLAY.
CONSISTENT COOLING.



Blue Star's engineers and designers have kept the consumer's needs in mind to provide a whole range of Multi-Deck Chillers and Freezers that have a stunning design and perform exceptionally well.

The cabinets of this product are designed to be a perfect fit for small, medium and large stores.

This refrigeration product also reduces energy costs as they are equipped with energy-efficient technology.

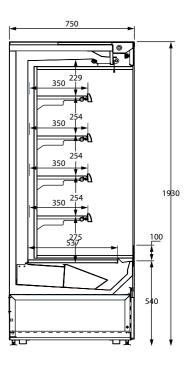

#### **Features**



Wide flexible display area



Uniform cooling to keep the food fresh for longer hours



Designed for modular configuration



Tempered and low emissivity glass



LED on each shelf



Available in different sizes (in feet): 4, 6, 8 & 12




Price holder flap on each shelf

MODEL NUMBER	KORAL12CGDP	KORAL18CGDP	KORAL12FGDP	KORAL18FGDP
Function	Chiller	Chiller	Freezer	Freezer
Size in ft	4	6	4	6
Temp Range <sup>0</sup> C	1~7ºC	1~7ºC	≤-18°C	≤-18°C
Voltage/Frequency	220~240/50 1 Phase	220~240/50 1 Phase	220~240/50 1 Phase	220~240/50 1 Phase
Refrigerant	R404a	R404a	R404a	R404a
Features				
Price Ticket Strip	Yes	Yes	Yes	Yes
Door	Self Closing	Self Closing	Self Closing	Self Closing
Shelf	5 Shelves	5 Shelves	5 Shelves	5 Shelves
Side Panel	Metal+Foaming	Metal+Foaming	Metal+Foaming	Metal+Foaming
Light	Yes	Yes	Yes	Yes
Temp Display	Digital	Digital	Digital	Digital
Dimension(W×D×H) in mm	1220×750×1930	1830×750×1930	1220×750×1930	1830×750×1930
Weight in kg	218	305	233	327

BLUE STAR MULTI-DECK CHILLERS WITHOUT GLASS DOOR - PLUG IN.

**ENHANCES CUSTOMER BUYING EXPERIENCE.** 

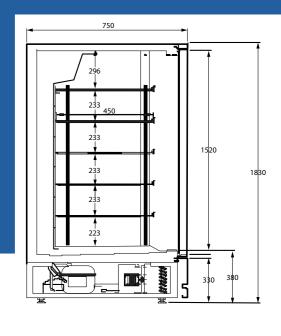



#### **Features**



Energy saving night blind



Electronic temperature control with digital display



Keeps delicate fruit, dairy and meat products fresh for longer hours



Customised adjustable shelves



LED on each shelf



Price holder flap on each shelf



Available in different sizes (in feet): 4, 6, 8 & 12




Door frame with silver handle

MODEL NUMBER	KORAL12CFV/DL/MT	KORAL18CFV/DL/MT	KORAL25CFV/DL/MT	
Function	Chiller	Chiller	Chiller	
Size in ft	4.28	6.32	8.35	
Temp Range °C	1ºC To 10ºC	1ºC To 10ºC	1ºC To 10ºC	
Voltage/Frequency	220~240/50 1 Phase	220~240/50 1 Phase	220~240/50 1 Phase	
Refrigerant	R404a	R404a	R404a	
Features				
Price Ticket Strip	Yes	Yes	Yes	
Night Blind	Yes	Yes	Yes	
Shelf	4 Shelves	4 Shelves	4 Shelves	
Side Panel	Tempered Glass	Tempered Glass	Tempered Glass	
Light	Yes	Yes	Yes	
Temp Display	Digital	Digital	Digital	
Dimension (W×D×H) in mm	1285×750×1930	1895×750×1930	2505×750×1930	
Weight in kg	210	310	395	

## BLUE STAR MULTI-DECK CHILLERS WITHOUT GLASS DOOR - REMOTE.

#### LARGER ON DISPLAY. BIGGER ON PROFITS.



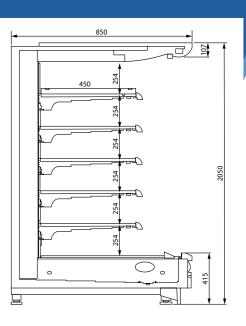

#### **Features**



Large flexible display area

Electronic



Uniform cooling to maintain the food fresh for longer hours



LED on each shelf



Designed for modular configuration

temperature control

with digital display



Customised adjustable shelves



Energy saving night blind



Price holders flaps on each shelf



Available in different sizes (in feet): 4, 6, 8 & 12

Function	KORAL12CDLR	KORAL18CDLR	KORAL24CDLR	KORAL37CDLR
Size in ft	4	6.25	8.33	12.5
Temp Range ºC	-1ºC~7ºC	-1ºC~7ºC	-1ºC~7ºC	−1ºC~7ºC
Voltage/Frequency	220VAC~240VAC, 50Hz	220VAC~240VAC, 50Hz	220VAC~240VAC, 50Hz	220VAC~240VAC, 50Hz
Rated Current [A]	0.85	1.25	1.68	2.41
Rated Power [W]	187	275	370	531
Refrigerant	R404a/R22	R404a/R22	R404a/R22	R404a/R22
Condenser Type	Copper	Copper	Copper	Copper
Evaporator Type	Copper+Fins	Copper+Fins	Copper+Fins	Copper+Fins
Cooling Type	Ventilated, Duct	Ventilated, Duct	Ventilated, Duct	Ventilated, Duct
Features				
Price Ticket Strip	Yes	Yes	Yes	Yes
Shelf Type	5 shelves	5 shelves	5 shelves	5 shelves
Side Panel	Glass Door	Glass Door	Glass Door	Glass Door
Light	Yes	Yes	Yes	Yes
Night Blind	Yes	Yes	Yes	Yes
Temp Display	Digital	Digital	Digital	Digital
Colour Option	Multiple	Multiple	Multiple	Multiple
Product Dimension(W×D×H) in mm	1250×850×2050	1875×850×2050	2500×850×2050	3750×850×2050
Weight in kg	150	230	300	425

## SEPRATER-07

BLUE STAR ECO-FRIENDLY GREEN PANELS WITH CYCLOPENTANE PUF INSULATION.

WORKS FOR NATURE. WORKS FOR YOU.



#### The Perfect Cold Room

A cold storage is a critical piece of infrastructure for any industry. The quality of stored produce and raw materials depend upon the reliable and precise functioning of the cold storage.

Blue Star's experience in creating cold storages that offer different storage conditions in terms of temperature, humidity, fresh air, air flow, etc., to suit different industry requirements has made them the leaders in this domain too.

The Company's engineers plan and design cold rooms based on advanced heat load calculations using internationally acclaimed softwares thus building your desired cold room with precision.

#### **Features**



PUF insulation core ensures excellent K factor



Suitable for a wide temperature range of -40°C to +80°C



High density polyurethane offers better strength



In case of fire, stops burning when source of fire is removed



Perfect joints eliminate air leakages



Occupies less space due to efficient insulation



Effective thermal insulation results in negligible thermal conductivity

SI. No.	Description	General Specifications
1	PUF Panel Thickness	60/80/100/127/152mm
2	PUF Panel Cover	PP or SS
3	Sheet Metal Thickness	0.4/0.5mm
4	Temperature Range	−40°C to 80°C
5	PUF Blowing Agent	Cyclopentane (C5) – (CFC & HCFC free)
6	Lock Arrangement	Cam-Lock with metal plunger
7	PUF Density	40Kg/m³ ±2Kg/m³
8	K Value (w/m oK)	0.021 – 0.023
9	Panel Length	Up to 11.5 m
10	Panel Width	11.5 / 23 / 34.5 / 46 inches
11	Panel Joint	Tongue & Groove joint
12	Panel to Panel Fitment	The gap between two fitted panels < 3 mm

## BLUE STAR REFRIGERATION SYSTEMS. HERMETIC SERIES.

Blue Star, India's leading refrigeration company, offers a complete range of evaporating and condensing units. These units are designed to deliver superior cooling for food preservation and are equipped to deliver temperatures for various applications. The balanced selection of the evaporator and condensing units assures delivery of capacity. The matching controllers with refrigeration units support each installation and enable the controlling and monitoring of temperature. So when it comes to cold storage, trust in the experts for reliable, efficient and trouble—free refrigeration.

#### **Evaporating Units**

Blue Star's evaporators are compact and sleek. The evaporator is housed within the cold storage and occupies minimum space. This allows you to utilise the maximum volume of cold storage.

#### **Features**



Stainless steel body (\$\$304) for enhanced durability and strength



Excellent corrosion resistance



Inner grooved copper tubes for superior heat transfer



4 FPI coil for medium & low temperature units



Improved air throw for uniform air distribution



External rotor driven fans have low noise levels and conform to IP45 standards



Removable side panels for easy service and minimum downtime



Defrost heaters for medium & low temperature units within the coil to ensure total defrost

#### **Condensing Units**

Blue Star's condensing units are characterised by high-efficiency heat transfer and low power consumption.

#### Features



Energy-efficient scroll and reciprocating compressors



Powder coated body makes these units UV and corrosion-resistant



Inner grooved copper tubes and slit aluminium fins for superior heat transfer



Filter drier for moisture and dirt protection



Smaller footprint for ease of handling and installation



Pre-charged unit with service valves



Safety and control devices for better system protection



Weather-proof polyester powder coated canopy



Thermally protected and permanently lubricated fan motors



#### Controller

Positive Room Temperature Controller:

#### **Features**

- Specifically designed for refrigeration applications
- Controls compressor cut off and temperature
- Fault alarm indication
- Two-compressor controller with separate set points and differentials



Medium & Negative Room Temperature Controller:

#### **Features**

- 4 digit, 1" dot matrix display
- Precise temperature range:  $50.0^{\circ}\text{C}$  to +  $50.0^{\circ}\text{C}$  and resolution 0.1° C
- Computer connectivity over RS485
- HP/LP, AUX faults for compressor protection
- Defrost heater operation based on compressor run time



#### **Power Panel**

Blue Star's Refrigeration Units come with ready-to-use power panels that make electrical connections simple, fast and long-lasting.

- Embedded switchgear in the Positive Temperature Condensing Unit
- Power Panel with necessary accessories and defrost controls is available for Medium and Low Temperature Units

#### **Technical Specifications**

High Temperature Air-Cooled Refrigeration System with R404A Refrigerant

Blue Si Indoor l		Cooling Capacities @ +4°C Room Temperature										
Descrip- tion/Model	Units	RUAH 00614KP–I	RUAH 01014KP-I	RUAH 01514KP-I	RUAH 02014KP-I	RUAH 03014CS- I-N	RUAH 04014CS- I-N	RUAHO 6024CS- I-N	RUAH 06014CS- I-N	RUAH 08024CS- I-N	RUAH 08014CS- I-N	
Nominal Capacity	Btu/hr	6,000	10,000	15,000	20,000	30,000	40,000	60,000	60,000	80,000	80,000	
Power Supply	V/Ph/Hz	230/1/50	230/1/50	230/1/50	230/1/50	230/1/50	230/1/50	415/3/50	415/3/50	415/3/50	415/3/50	
F 14 .	Watt	85	85	85	85	250	380	815	815	815	815	
Fan Motor	Qty	1	2	3	4	2	2	2	2	2	2	
Airflow	CFM	800	1600	2400	3200	4580	5230	12000	12000	11700	11700	
Air Throw	Feet	12	14	16	16	25	40	45	45	45	45	
No. of Cir- cuits	Nos.	1	1	1	1	1	1	2	1	2	1	
Overall Dimen- sions (Wx- DxH)	mm	864x480 x450	1245x480 x450	1780x480 x450	2210x480 x450	1707x646 x718	1707x646 x718	2142x841 x956	2142x841 x956	2142x841 x956	2142x841 x956	
Dry Weight	kgs	18	25	35	45	75	85	140	140	150	150	

	Blue Star Outdoor Unit		Cooling Capacities @ +4°C Room Temperature									
Description/ Model	Units	RUAH OPO614	RUAH OP1014	RUAH OP1514	RUAH 0S2014	RUAH 0S3014	RUAH 0S4014	RUAH 0S3014	RUAH 0S6014	RUAH 0S4014	RUAH 0S8014	RUAH 0S12014
Nominal Capacity	Btu/hr	6,000	10,000	15,000	20,000	30,000	40,000	2 x 30,000 =60,000	60,000	2 x 40,000 =80,000	80,000	1,20,000
Compressor Type	-	Hermetic Recip	Hermetic Recip	Hermetic Recip	Hermetic Scroll	Hermetic Scroll	Hermetic Scroll	Hermetic Scroll	Hermetic Scroll	Hermetic Scroll	Hermetic Scroll	Hermetic Scroll
Power Supply	V/Ph/ Hz	230/1/50	230/1/50	230/1/50	415/3/50	415/3/50	415/3/50	415/3/50	415/3/50	415/3/50	415/3/50	415/3/50
Comp. Quantity	Nos.	1	1	1	1	1	1	1 in each chassis	1	1 in each chassis	1	1
No. of such Chassis	Nos.	1	1	1	1	1	1	2 x RUAHOS3014	1	2 x RUAHOS4014	1	1
Each Chassis Overall Dimen- sions (WxDxH)	mm	910x370 x560	910x370 x560	910x370 x560	1082x464 x657	1082x 464 x1261	1082x464 x1261	1082x464 x1261	1532x654 x947	1082x 464 x1261	1532x654 x947	1450x880 x1115
Each Chassis Dry Weight	kgs	51	61	80	110	125	132	125	185	132	190	275
Each Chassis Refrigerant Pre-charged Qty	kgs	1.2	1.6	2	2.5	3.5	4	3.5	8	4	9	12

Note: Specifications are subject to change without prior notice Cooling capacity at the Rated condition 35 Amb Temp/+4°C Room Temp /10SH Units tested up to 50°C ambient as per standard

#### **Technical Specifications**

High Temperature Air-Cooled Refrigeration System with R22 Refrigerant

Blue Sta Indoor U		Cooling Capacities @ +4°C Room Temperature									
Description /Model	Units	RUAH 00612KP-I	RUAH 01012KP-I	RUAH 01512KP–I	RUAH 02012KP-I	RUAHO 3012CS- I-N	RUAH 04012CS- I-N	RUAH 06022CS- I-N	RUAH 08022CS- I-N	RUAH 08012CS- I-N	
Nominal Capacity	Btu/hr	6,000	10,000	15,000	20,000	30,000	40,000	60,000	80,000	80,000	
Power Supply	V/Ph/ Hz	230/1/50	230/1/50	230/1/50	230/1/50	230/1/50	230/1/50	415/3/50	415/3/50	415/3/50	
For Motor	Watt	85	85	85	85	250	380	815	815	815	
Fan Motor	Qty	1	2	3	4	2	2	2	2	2	
Airflow	CFM	800	1600	2400	3200	4580	5230	12000	11700	11700	
Air Throw	Feet	12	14	16	16	25	40	45	45	45	
No. of Circuits	Nos.	1	1	1	1	1	1	2	2	1	
Overall Dimen sions (WxDxH)	mm	864x480x450	1245x480x450	1780x480x450	2210x480x450	1707x646x718	1707x646x718	2142x841x956	2142x841x956	2142x841x956	
Dry Weight	kgs	18	25	35	45	75	85	140	150	150	

Blue Sta Outdoor			Cooling Capacities @ +4°C Room Temperature							
Description /Model	Units	RUAH 00612KP-0	RUAH 01012KP-0	RUAH 01512KP-0	RUAH 02012KP-0	RUAH 03012CS-0	RUAH 04012CS-0	RUAH 03012CS-0	RUAH 04012CS-0	RUAH 0S08012
Nominal Capacity	Btu/hr	6,000	10,000	15,000	20,000	30,000	40,000	2 x 30,000 =60,000	2 x 40,000 =80,000	80,000
Compressor Type	-	Hermetic Recip	Hermetic Recip	Hermetic Recip	Hermetic Recip	Hermetic Scroll	Hermetic Scroll	Hermetic Scroll	Hermetic Scroll	Hermetic Scroll
Power Supply	V/Ph/Hz	230/1/50	230/1/50	230/1/50	415/3/50	415/3/50	415/3/50	415/3/50	415/3/50	415/3/50
Comp. Quantity	Nos.	1	1	1	1	1	1	1 in each chassis	1 in each chassis	1
No. of such Chassis	Nos.	1	1	1	1	1	1	2 x RUAH 03012CS-0	2 x RUAH 04012CS-0	1
Each Chassis Overall Dimen sions (WxDxH)	mm	910x370x560	910x370x560	910x370x560	1082x464x657	1082x464x1261	1082x464x1261	1082x464x1261	1082x464x1261	1532x654x947
Each Chassis Dry Weight	kgs	51	61	80	110	125	125	125	125	190
Each Chassis Refrigerant Precharged Qty	kgs	1.2	1.6	2	2.5	3.5	4	3.5	4	9

Note: Specifications are subject to change without prior notice Cooling capacity at the Rated condition 35 Amb Temp/+4°C Room Temp /10SH Units tested up to 50°C ambient as per standard

#### **Technical Specifications**

High Temperature Air-Cooled Refrigeration System with R410A Refrigerant

Blue Star Indoor Unit		Cooling Capacities @ +18°C Room Temperature						
Description/Model	Units	RUAH03611-I	RUAH06611-I	RUAH10211-I	RUAH13211-I			
Nominal Capacity	Btu/hr	36,000	66,000	1,02,000	1,32,000			
Power Supply	V/Ph/Hz	230/1/50	230/1/50	415/3/50	415/3/50			
Fon Motor	Watt	85	380	815	815			
Fan Motor	Qty	4	2	2	2			
Airflow	CFM	3200	5230	12000	11700			
Air Throw	Feet	16	40	45	45			
No. of Circuits	Nos.	1	1	1	1			
Overall Dimensions (WxDxH)	mm	2210x480x450	1707x646x718	2142x841x956	2142x841x956			
Dry Weight	kgs	45	85	140	150			

Blue Star Outdoor Unit		Cooling Capacities @ +18°C Room Temperature						
Description/Model	Units	RUAHOR3611	RUAHOS6611	RUAHOS10211	RUAHOS13211			
Nominal Capacity	Btu/hr	36,000	66,000	1,02,000	1,32,000			
Compressor Type	-	Hermetic Rotary	Hermetic Scroll	Hermetic Scroll	Hermetic Scroll			
Power Supply	V/Ph/Hz	415/3/50	415/3/50	415/3/50	415/3/50			
Comp. Quantity	Nos.	1	1	1	1			
No. of such Chassis	Nos.	1	1	1	1			
Each Chassis Overall Dimensions (WxDxH)	mm	1071x464x655	1089x484x925	1417x451x925	1514x651x919			
Each Chassis Dry Weight	kgs	80	90	150	190			
Each Chassis Refrigerant Precharged Qty	kgs	2	4	5	6			

Note: Specifications are subject to change without prior notice Cooling capacity at the Rated condition 35 Amb Temp/+18°C Room Temp /10SH Units tested up to 50°C ambient as per standard

#### **Technical Specifications**

Medium Temperature Air-Cooled Refrigeration System with R404A Refrigerant

Blue Star Indoor Unit		Cooling Capacities @ −5°C Room Temperature						
Description/Model	Units	RUAM01214-I-N	RUAM01514-I-N	RUAMO2014-I-N	RUAM03514-I-N			
Nominal Capacity	Btu/hr	12,000	15,000	20,000	35,000			
Power Supply	V/Ph/Hz	415/3/50	415/3/50	415/3/50	415/3/50			
Fan Motor	Watt	85	85	85	380			
	Qty	2	3	4	2			
Airflow	CFM	1600	2400	3200	5500			
Air Throw	Feet	14	16	16	40			
No. of Circuits	Nos.	1	1	1	1			
Overall Dimensions (WxDxH)	mm	1250x480x440	1780x480x440	2210x480x440	1710x645x720			
Dry Weight	kgs	37	45	58	89			

Blue Star Outdoor Unit		Cooling Capacities @ −5°C Room Temperature						
Description/Model	Units	RUAM01214-0	RUAM01514-0	RUAM02014-0	RUAM03514-0			
Nominal Capacity	Btu/hr	12,000	15,000	20,000	35,000			
Compressor Type	-	Hermetic Recip	Hermetic Scroll	Hermetic Scroll	Hermetic Scroll			
Power Supply	V/Ph/Hz	415/3/50	415/3/50	415/3/50	415/3/50			
Comp. Quantity	Nos.	1	1	1	1			
No. of such Chassis	Nos.	1	1	1	1			
Each Chassis Overall Dimensions (WxDxH)	mm	1100x464x660	1100x464x660	1100x464x1260	1100x464x1260			
Each Chassis Dry Weight	kgs	83	86	131	136			
Each Chassis Refrigerant Precharged Qty	kgs	2.5	2.5	3.5	4			

Note: Specifications are subject to change without prior notice Cooling capacity at the Rated condition 35 Amb Temp/-5°C Room Temp /10SH Units tested up to 50°C ambient as per standard

#### **Technical Specifications**

Low Temperature Air-Cooled Refrigeration System with R404A Refrigerant

Blue Star Indoor Unit		Cooling Capacities @ -23°C Room Temperature						
Description/Model	Units	RUALOO614-I-N	RUALOO914-I-N	RUALO1214-I-N	RUAL01814-I-N1	RUAL02414-I-N		
Nominal Capacity	Btu/hr	6,000	9,000	12,000	18,000	24000		
Power Supply	V/Ph/Hz	415/3/50	415/3/50	415/3/50	415/3/50	415/3/50		
F. W.	Watt	85	85	85	380	815		
Fan Motor Qty	Qty	2	3	4	2	2		
Airflow	CFM	1600	2400	3200	5500	11700		
Air Throw	Feet	14	16	16	40	45		
No. of Circuits	Nos.	1	1	1	1	1		
Overall Dimensions (WxDxH)	mm	1245x480x450	1780x480x450	2210x480x450	1707x646x718	2142x841x956		
Dry Weight	kgs	37	45	58	89	135		

Blue Star Outdoor Unit		Cooling Capacities @ -23°C Room Temperature						
Description/Model	Units	RUAL00614S-0-N1	RUAL00914S-0-N1	RUAL01214S-0-N1	RUAL01814S-0-N1	RUAL02414S-0-N1		
Nominal Capacity	Btu/hr	6,000	9,000	12,000	18,000	24,000		
Compressor Type	-	Hermetic Scroll	Hermetic Scroll	Hermetic Scroll	Hermetic Scroll	Hermetic Scroll		
Power Supply	V/Ph/Hz	415/3/50	415/3/50	415/3/50	415/3/50	415/3/50		
Comp. Quantity	Nos.	1	1	1	1	1		
No. of such Chassis	Nos.	1	1	1	1	1		
Each Chassis Overall Dimensions (WxDxH)	mm	1222x539x669	1222x539x669	1240x539x962	1240x539x962	1240x539x962		
Each Chassis Dry Weight	kgs	105	115	117	135	148		
Each Chassis Refriger- ant Precharged Qty	kgs	2.5	3	4	5	6		

Blue Star Outdoor U	Init	Cooling Capacities @ -23°C Room Temperature			
Description/Model	Units	RUAL00614P-0	RUAL00914P-0		
Nominal Capacity	Btu/hr	6,000	9,000		
Compressor Type	-	Hermetic Recip	Hermetic Recip		
Power Supply	V/Ph/Hz	415/3/50	415/3/50		
Comp. Quantity	Nos.	1	1		
No. of such Chassis	Nos.	1	1		
Each Chassis Overall Dimensions (WxDxH)	mm	1222x539x669	1222x539x669		
Each Chassis Dry Weight	kgs	80	93		
Each Chassis Refrigerant Precharged Qty	kgs	2.5	3		

**Note:** Specifications are subject to change without prior notice Cooling capacity at the Rated condition 35 Amb Temp/ $-23^{\circ}$ C Room Temp /10SH Units tested up to  $50^{\circ}$ C ambient as per standard

Notes	Notes

# BLUE STAR HARD TOP DEEP FREEZER.

# **UNMATCHED COOLING PERFORMANCE.**

foods. The range of Hard—top Deep Freezers from Blue Star incorporate cutting—edge technology







Antibacterial Gasket Removable gasket with silver ions offers greater food-safety assurance.



Convertible Cooling Technology Can work as Freezer or Cooler as per need.

**₩** 

Corrosion Resistant Body Anti-corrosive body, embossed metal surface finish and long product life.



**Efficient Compressor** Highly Energy-



Robust Construction For long life.

Model	Unit	CF3-300MEW-SD/MPW-SD	CF3-300MEW/MPW	CF3-400MEW/MPW	CF3-500MEW/MPW
Star Rating		က	e	က	က
Gross Capacity	_	301	301	401	484
Temperature Range		8°C to -26°C	8°C to -26°C	8°C to -26°C	8°C to -26°C
Refrigerant		R290	R290	R290	R290
No. of Lids		-	2	2	2
Inner Cabinet		Embossed/ Plain Sheet	Embossed/ Plain Sheet	Embossed/ Plain Sheet	Embossed/ Plain Sheet
PUF Thickness	m m	09	09	09	09
Overall Dimensions (WXDXH)	E	1147 x 678 x 857	1147 x 678 x 857	1447 x 678 x 857	1647 x 678 x 857
Overall Dimensions (WXDXH)	Inch	45 X 27 X 34	45 X 27 X 34	57 X 27 X 34	65 X 27 X 34
Net Weight	Kg	46 / 47	47 / 49	56 / 58	61 / 63
Basket - Metal		1	-	1	-







#### STAY FRESH. STAY COMPACT.

Blue Star offers a compact hard top deep freezer that is ideal for domestic or commercial use. It comes with a star rating that ensures its energy saving capabilities. Manufactured in our world-class state of the art factory, this product is made in India in every sense of the word.



#### Features



Wide Range – Elegant Control Panel Smart eye and Square design with LED light.



Compact machine Ideal for small storage.



Super Tropicalised Designed to work even in 47°C ambient summer conditions.



Plastic Baskets Long-lasting, corrosion-free, food-grade.



Quadracool Technology
Ensures even and optimum cooling from four sides.



Robust Construction For long life.

Model	Unit	CF2-90NEYW	CF3-130NEYW	CF4-180NEYW	CF4-230NEYW
Star Rating		2	3	4	4
Gross Capacity	L	71	108	161	215
Temperature Range		8°C to -26°C	8°C to -26°C	8°C to -26°C	8°C to -26°C
Refrigerant		R600a	R600a	R600a	R600a
No. of Lids		1	1	1	1
Inner Cabinet		Embossed	Embossed	Embossed	Embossed
PUF Thickness	mm	60	60	60	60
Overall Dimensions (WXDXH)	mm	505 X 570 X 829	575 X 570 X 829	765 X 570 X 842	955 X 571 X 842
Overall Dimensions (WXDXH)	Inch	20 X 22 X 33	23 X 22 X 33	30 X 22 X 33	38 X 22 X 33
Net Weight	Kg	25	28	31	35
Baskets Plastic		1	1	1	1



#### SUPER-FREEZING MARVEL.



Blue Star's Compact Glass Top Deep Freezer is the perfect choice in a domestic or commerical setting. It provides optimal storage space and Low E-Toughened glass that seamlessly displays products. It is available in multiple colours and also comes with a star rating that ensures its energy saving capabilities. Manufactured in our world-class state of the art factory, this product is truly Indian at heart.

#### Features



Optimised Storage Space Industry-leading cooling, maximises display. Scooping depth for candy cones, boosting profits with increased storage capacity.



Super Tropicalised
Designed to work even in 47°C ambient summer conditions.



Low E-Toughened Glass Reflective glass for high performance and better visibility.



Maximum Frontal Branding Area
Temperature controller on side grill ensures
100% space for branding on the front.



Multi-Colour Frame Options Allows for customisation to enhance brand display and awareness.



Plastic Baskets Long-lasting, corrosion-free, food-grade.

Model	Unit	GT5-130NP	GT5-180NP	GT5-230NP
Star Rating		5	5	5
Gross Capacity	L	108	161	215
Temperature Range		−13°C to −26°C	−13°C to −26°C	−13°C to −26°C
Refrigerant		R600a	R600a	R600a
No. of Lids		2	2	2
Inner Cabinet		Embossed	Embossed	Embossed
PUF Thickness	mm	60	60	60
Overall Dimensions (WXDXH)	mm	577 X 527 X 810	767 X 527 X 810	957 X 527 X 810
Overall Dimensions (WXDXH)	Inch	23 X 21 X 32	30 X 21 X 32	38 X 21 X 32
Net Weight	Kg	29	32	37
Baskets Plastic		1	1	2



## YOUR SEARCH FOR UNIFORM COOLING ENDS HERE.

SUPER COOLERS RANGE



Blue Star presents a range of Super Coolers that are high on performance and perfect for heavy-duty applications. Equipped with a ventilated cooling mechanism that ensures both fast and uniform cooling, these visi coolers make sure every shelf and every corner is just as cold as the other.



Pre-coated metallic inner and outer cabinet for durability and enhanced cooling



Tropicalised for harsh Indian weather conditions



Castor wheels for easy movement



Corrosion-free aluminium door frame



LED lighting for better visibility



Self-closing doors



Adjustable shelves



Locks in all models



Eco-friendly refrigerant (R134a)



Description	Units	SC300F	SC375F	SC500F	SC650F	SC1000F
Gross Capacity	L	285	358	448	595	947
Temperature		+2°C to +10°C	+2°C to +10°C	+2°C to +10°C	+2°C to +10°C	+2°C to +10°
Power Supply		220V/50Hz/1Ph	220V/50Hz/1Ph	220V/50Hz/1Ph	220V/50Hz/1Ph	220V/50Hz/
Refrigerant		R134a	R134a	R134a	R134a	R134a
No. of Doors	Nos.	1	1	1	1	2
Provision for Locking		Available	Available	Available	Available	Available
Overall Dimensions (including hinge, castor etc.)	mm	576x686x1454	576x686x1724	576x686x2055	739x686x2063	1025x781x20
Net Weight	kg	71	81	96	108	171
No. of Shelves	Nos.	Wire /4	Wire /5	Wire /5	Wire /5	Wire /10

## BLUE STAR TROPICAL COOLERS.'

## **DURABILITY IN ITS GENES.** COPPER IN ITS DNA.

The new range of tropical coolers from Blue Star helps in adding premium look to your store, while displaying the products in the most aesthetical manner. Equipped with copper condenser and evaporator, these tropical coolers are the sturdiest and the most efficient. The ventilated cooling mechanism ensures the uniform and reflective glass along with the LED Lighting increases the visibility of the product, faster cooling, so that every shelf and every corner is just as cold as the other. These are the smartest choice for harsh tropical summers in India. The clear



#### Features



Heavy duty copper condenser and evaporator



LED lighting for better visibility



Tropicalised for harsh Indian summers



Digital temperature display

T<u>u</u>

Adjustable shelves

Ventilated Model with uniform cooling



Description	Units	TC290V	TC330V	TC450V	TC550V	TC590V	TC710V	TC1050V	TC1250V
Gross Capacity	7	235	305	400	475	525	625	1002	1150
Temperature					+2°C fc	+2°C to +10°C			
Power Supply					230V/5	230V/50Hz/1Ph			
Refrigerant					RTE	R134a			
No. of Doors	Nos.	-	-	-	-	-	-	2	2
Overall Dimensions (including hinge, castor etc)	E	500*660*1448	514*660*1725	583*715*1792	583*715*2053	640*715*2053	640*785*2135	1050*785*2200 1152*785*2188	1152*785*2188
Net Weight	δ	72	63	96	102	108	117	143	180
No. of Shelves	Nos.	3	4	5	5	5	5	10	10
Canopy		No	Yes	Yes	Yes	Yes	Yes	Yes	Yes
No. of PET Bottles (500 ml)	Nos.	126	144	196	245	280	320	476	560
Copper Cond and Evap.		No	No	No	No	Yes	Yes	Yes	Yes
Digital Display		No	Yes	Yes	Yes	Yes	Yes	Yes	Yes







#### **Technical Specifications**

		VISICOOLER D SERIES									
		VC65D	VC125D	VC175D	VC250D	VC275D	VC325D	VC590D			
Gross Capacity	L	55	130	170	220	250	300	530			
Temeprature		0°C to +10°C	+2°C to +8°C								
Power Supply		230V/1Ph/50Hz	230V/1Ph/50Hz	230V/1Ph/50Hz	230V/1Ph/50Hz	230V/1Ph/50Hz	230V/1Ph/50Hz	230V/1Ph/50Hz			
Refrigerant		R600a	R600a	R600a	R600a	R600a	R600a	R290			
No of Doors	Nos	1	1	1	1	1	1	2			
Provision for Locking		Available	Available	Available	Available	Available	Available	Available			
Overall Dimensions (including hinge, castor etc)	mm	445 x 510 x 501	495 x 515 x 1160	495 x 515 x 1280	535 x 520 x 1735	575 x 600 x 1705	615 x 610 x 1790	1000 x 580 x 1855			
Net Weight	kg	19	44	46	61	61	64	115			
No of Shelves	Nos	Wire /3	Wire /3	Wire/4	Wire/4	Wire/4	Wire/4	Wire/4			

		VISICOOLER A SERIES					VISIO	FREEZER		
		VC95A	VC150A	VC190A	VC290A	VC400A	VC415E	VC750E	VC1250E	VF375E
Gross Capacity	L	95	140	165	285	385	372	657	945	300
Temeprature		+1°C to +10°C	+1°C to +10°C	+1°C to +10°C	+1°C to +10°C	+1°C to +10°C	+1°C to +10°C	+1°C to +10°C	+1°C to +10°C	-18°C to -22°C
Power Supply		220V/1Ph/50Hz	220V/1Ph/50Hz	220V/1Ph/50Hz	220V/1Ph/50Hz	220V/1Ph/50Hz	230V/1Ph/50Hz	230V/1Ph/50Hz	230V/1Ph/50Hz	230V/1Ph/50Hz
Refrigerant		R600a	R600a	R600a	R600a	R600a	R600a	R600a	R290	R404a
No of Doors	Nos	1	1	1	1	1	1	1	2	1
Provision for Locking		Available	Available	Available	Available	Available	Available	Available	Available	Available
Overall Dimensions (including hinge, castor etc)	mm	470x535x812	470x535x1177	500×578×1520	621x688x1709	645x618x1949	595x640x1980	780x705x2080	1200x742x2000	595x640x1965
Net Weight	kg	30.5	35.5	46	59	68	81	123	164	96
No of Shelves	Nos	Wire /2	Wire /3	Wire /3	Wire /3	Wire /4	Wire/5	Wire/5	Wire/5	Wire/6

As a continuing policy of research and development in Blue Star, the design, features, technical specifications are subject to change without prior notice. The product images shown are for reference only and actual products may differ. Values mentioned are under standard tested conditions in lab. Actual performance values may vary with different ambient conditions. Features may vary from model to model.





















### **PROFIT FROM COOLING**

COMMERCIAL REFRIGERATION RANGE





### **ABOUT TATA GROUP**



Founded in 1868, The Tata Group is a **global** business group with products and services in over **150** countries, over **706,511** employees and operations in over **100** countries. The group revenue is **\$110.7bn** with over **60%** generated in geographies other than India. The group is the **global leader** in several sectors.

Voltas Limited is a premier air conditioning and engineering solutions provider and a project specialist. Founded in India in 1954, Voltas Limited is a part of the Tata Group, and in addition to Air Conditioners, Air Coolers, Water Dispensers, Water Coolers and Commercial Refrigeration products. Voltas offers smart engineering solutions for a wide spectrum of industries in areas such as heating, ventilation and air conditioning, refrigeration, electro-mechanical projects, electrification, textile machinery, mining and construction equipment, water management & treatment, cold chain solutions, building management systems and indoor air quality. Voltas Limited is among the top 10 companies within the Tata Group and is the undisputed market leader in room Air Conditioners in India.

Since the launch, Voltas Commercial Refrigeration has been the undisputed leader in the cooling space. It offers a wide range of Commercial Refrigeration, Water Cooler and Water Dispenser products loaded with latest technology. The product range is thoughtfully made, keeping you and your business in mind and comes with features that boast of unmatched performance while being eco-friendly.





AIR COOLERS | AIR CONDITIONERS | AIR PURIFIERS | COMMERCIAL REFRIGERATION WATER COOLERS | WATER DISPENSERS | COLD ROOM | MEDICAL REFRIGERATION CHOCOLATE COOLERS | WASHING MACHINE | REFRIGERATOR | MICROWAVE OVEN DISHWASHER | WATER HEATERS















## HARD TOP CHEST FREEZERS



### NEW 5 STAR







The Hard Top Chest Freezers are a great storage solution for ice-creams and frozen foods. The freezers are tropicalized for high temperatures. Excellent insulation helps maintain freezer temperatures even during power outages. Their corrosion-resistant durable bodies ensure reliability for years. Also, designed with an eco-friendly refrigerant and an energy-efficient compressor, they're great for the environment also.



Soft Aestheti



Rollers For Easy Mobility



Star



Aluminium Inner Liner



UV Grade Plastic For Long-lasting Appearance



Door Lock For Restricted Accessibility



Anti-corrosive Pre-coated Body



Eco-friendly Refrigerant



Safety Complian



Sunken Handle For Safer Operation



Tropicalized Machines



Compact Design



Spring Loaded Hinges For Effortless Usage

Description	CF320DD/CF320DA5-P	CF405DD	CF500DD	CF600TA4-P
Design Ambient	43°C	43°C	43°C	43°C
Product Dimension (WxDxH)	1180x665x830	1450x665x830	1680x665x830	1915x665x860
Temperature Range	<-18°C	<-18°C	<-18°C	<-18°C
Storage Volume (In Litre)	277/286	354	421	508
BEE Star Rating	3 Star/5 Star	3 Star	4 Star	4 Star
Refrigerant	R290	R290	R290	R290
No. Of Doors	2	2	2	3
No. Of Baskets	1	2	2	3
PUF Thickness	60 mm	60 mm	60 mm	60 mm
Door Lock	Available	Available	Available	Available
Wheel	Uni Direction Roller	Wheel	Wheel	Wheel
Power Plug /Cable	6 Åmps, 2.5 metre	6 Åmps, 2.5 metre	16 Åmps, 2.5 metre	16 Amps, 2.5 metre





## HARDTOP CONVERTIBLE



### NEW 5 STAR



These Convertibles aesthetically crafted with Grey Embossed Metal Sheets are built to last years & give a premium look and feel. A marvel of cutting edge Dual Temperature Technology while being energy efficient, it uses eco-friendly refrigerants to store your beverage, dairy, frozen food products at their ideal temperature for the end consumers to enjoy products cold or frozen.



Soft Aestheti Design



Rollers For Easy Mobility



Star



UV Grade Plastic For Long-lasting Appearance



Door Lock For Restricted Accessibility



Anti-corrosive Pre-coated Body



Eco-friendly Refrigerant



Dual Temperature Freezing/Cooling



Safety Compliant



Sunken Handle For Safer Operation



Tropicalized Machines



Compact Design



Spring Loaded Hinges For Effortless Usage

Description	CVF 100 SD	CVF 205 SA2-P	CVF 320 DD/CVF 320 DA5-P	CVF 405 DD	CVF 500 DD
Design Ambient	43°C	43°C	43°C	43°C	43°C
Product Dimension (WxDxH)	515X580X876	834x665x830	1180x665x830	1450x665x830	1680x665x830
Temperature Range	<-18 °C (Freezer),	<-18°C (Freezer),	<-18°C (Freezer),	<-18°C (Freezer),	<-18°C (Freezer),
,	0° to 7°C (Cooler)	0° to 7°C (Cooler)	0° to 7°C (Cooler)	0° to 7°C (Cooler)	0° to 7°C (Cooler)
Storage Volume (In Litre)	98	177	277/286	354	421
BEE Star Rating	2 Star	2 Star	3 Star/ 5 Star	4 Star	4 Star
Refrigerant	R600	R290	R290	R290	R290
No. Of Doors	1	1	2	2	2
No. Of Baskets	1	1	2	2	2
PUF Thickness	60 mm	60 mm	60 mm	60 mm	60 mm
Door Lock	Available	Available	Available	Available	Available
Wheel	Uni Direction Roller	Uni Direction Roller	Uni Direction Roller	Wheel	Wheel
Power Plug /Cable	6 Amps, 1.8 metre	6 Amps, 2.5 metre	6 Amps, 2.5 metre	16 Amps, 2.5 metre	16 Amps, 2.5 metre



## FLAT GLASS TOP FREEZERS



### NEW RANGE 5 STAR





Frozen foods and ice-creams find a robust and reliable home in the New 5 Star Flat Glass Top Freezers to showcase the products more prominently. Built sturdy for heavy use. Freezers are tropicalised for better cooling at higher temperatures. Low emissivity glass for better visibility and insulation. Also available with optional special baskets and LED lights.



Soft Aesthetic



Wheel For



Special Baskets\*



Star



Rugged And Heavy-duty Shelves



UV Grade Plastic For Long-lasting Appearance



Door Lock For Restricted Accessibility



Anti-corrosive Pre-coated Body



Low Emissivity Glass To Avoid Cooling Loss



Compact Desig



Safety Compliant



Tropicalized Machines



Aluminium Inner Liner



Refrigerant



LED Light\*



Longer Cooling Retention

Description	GT220GA5-P	GT340GA5-P	GT440GA5-P	GT520GA5-P
Design Ambient	43°C	43°C	43°C	43°C
Product Dimension (WxDxH)	834 x 620 x 855	1180 x 620 x 855	1450 x 620 x 855	1680 x 620 x 855
Temperature Range	<-18°C	<-18°C	<-18 ° C	<-18°C
Storage Volume (In Litre)	176	275	326	388
BEE Star Rating	5 Štar	5 Štar	5 Star	5 Star
Refrigerant	R290	R290	R290	R290
No. Of Glass Doors	2	2	2	2
No. Of Baskets	1	2	2	2
PUF Thickness	60 mm	60 mm	60 mm	60 mm
Door Lock	Available	Available	Available	Available
Wheel	Castor Wheel	Castor Wheel	Castor Wheel	Castor Wheel
Power Plug /Cable	6 Amps, 2.5 metre	16 Amps, 2.5 metre	16 Amps, 2.5 metre	16 Amps, 2.5 metre





## COMBO COOLERS





Enjoy the dual functionality of a cooler and a freezer. The cooler compartment can be used for storing cold beverages and at the same time the freezer, for storing ice-cream and frozen foods. The coolers come with robust construction for heavy duty use. Tropical compressor in Combo Coolers ensure high performance freezing even in higher ambient temperatures of the Indian summer.



Soft Aesthetic Design



Castor Wheels For Easy Mobility



Energy-efficient Compressor



Upto 40% Electricity Saving



Aluminium Inner Liner



UV Grade Plastic For Long-lasting Appearance



Door Lock For Restricted Accessibility



Anti-corrosive Pre-coated Body



Eco-friendly Refrigerant



Compact Design



Safety Compliant



Tropicalized Machines



Dual Temperature Freezing/Cooling



Spring Loaded Hinges For Effortless Usage

Description	CB HT 300 DD V	CB HT 400 DD V		
Product Dimension	1329x575x832	1275x740x825		
Temperature Range	<-18°C (Freezer),0° to 7°C (Cooler)	<-18°C (Freezer), 0° to 7°C (Cooler)		
Gross Volume (In Litre)	300	400		
Refrigerant	R600	R290		
PUF Thickness	65 mm	70 mm		
No. Of Shelves	1	1		
No. Of Doors	2	2		
Arrangement for Door Lock	Available	Available		



### **VISI COOLERS**















Form meets function in this stylish glass door merchandiser. The Visi Coolers are especially designed to cool products uniformly as well as showcase the products inside, ideal for storing beverages and dairy products for a longer time at desired temperatures. The low emissivity glass is there for more than just good looks. It also restricts the loss of cooling. The coolers are tropicalized for cooling in high temperatures and designed for faster pull down time. These compact storage solutions are a perfect match for commercial cooling purposes.







Wheels For Easy Mobility



LED Light\*



Upto 40% Electricity
Saving



Rugged And Heavy-duty Shelves



UV Grade Plastic For Long-lasting Appearance



Anti-corrosive Pre-coated Body



Eco-friendly Refrigerant



Longer Cooling Retention



Low Emissivity Glass To Avoid Cooling Loss\*



Compact Design



Energy-efficient Compressor



Safety Compliant



Tropicalized Machines



Self Closing Door

Description	VC 70	VC 120	VC 220	VC 320	VC 450	VC 550 SD/DD
Design Ambient	41°C	41°C	41°C	41°C	41°C	41°C
Product Dimension (WxDxH)	455 x 530 x 720	480 x 585 x 1045	535 x 670 x 1400	560 x 705 x 1700	650 x 730x 1900	770 x 740 x 1970
Temperature Range	0°C to 10°C	0°C to 10°C	0°C to 10°C	0°C to 10°C	0°C to 10°C	0°C to 10°C
Gross Volume (In Litre)	70	120	220	320	450	550
Refrigerant	R-134a	R-134a	R-134a	R-134a	R-134a	R-134a
Illumination Inside / Canopy	LED	LED	LED	LED	LED	LED
No. Of Shelves	2	2	3	4	5	5
No. Of Glass Doors	1	1	1	1	1	1/2
Arrangement for Door Lock	Available	Available	Available	Available	Available	Available
Foot/Wheel	Available	Available	Available	Available	Available	Available
Power Plug /Cable	6 Amps, 1.5 metre	6 Amps,1.5 metre	6 Amps,1.5 metre	6 Amps, 2.5 metre	6 Amps,2.5 metre	16 Amps, 2.5 metre





## CHOCOLATE COOLERS







What could make chocolates look even better? The Chocolate Coolers from Voltas.

Combining sturdy with style, their polished design showcases the chocolates in the best way possible.

The coolers are tropicalised to maintain the optimum temperature under high ambient temperatures.

The shelves are customisable. It even comes with optional LED lights to shine the spotlight on your star products.



Single Mould Construction



LED Light\*



Aluminium Inner Liner



Safety Compliant



UV Grade Plastic For Long-lasting Appearance



Anti-corrosive Pre-coated Body



Eco-friendly



Tropicalized Machines



Low Emissivity Glass To Avoid Cooling Loss



Compact Design



Energy-efficient Compressor



Soft Aestheti Design

Description	CT 15	CT 33		
Product Dimension (WxDxH)	440 x 600 x 450	610 x 538 x 450		
Temperature Range	16°C to 24°C	16°C to 24°C		
Gross Volume (In Litre)	15	33		
Refrigerant	R-134a	R-134a		
No. Of Shelves	1	2		
No. Of Glass Doors	1	1		
Arrangement for Door Lock	N/A	Available		
Wheel	Legs	Legs		





Quench your thirst for chilled water with Voltas Water Coolers. Available in wide range with a powerful and rugged compressor, with faster cooling, eco-friendly and food grade stainless steel body. Stay refreshed with Voltas Water Coolers. Enjoy cool, clean water anytime.



Soft Aesthetic



Longer Cooling



Compact Design



Safety



Upto 40% Electricity Savir



Eco-friendly Refrigerant



Anti-corrosive Pre-coated Body



Energy-efficient Compressor



Tropicalized Machines



In-situ Puf Insulation



Food Grade Stainless Stee

Description	20/20 PSS & FSS	20/40 PSS & FSS	40/40 PSS & FSS	40/80 PSS & FSS	60/80 PSS & FSS	60/120 PSS & FSS	150/150 PSS & FSS-ROTARY	150/300 PSS & FSS-RECIP
Storage Capacity (Litre)	20	40	40	80	80	120	150	300
Cooling Capacity (Litre/hour)	20	20	40	40	60	60	150	150
Refrigerant	R- 134a	R - 22	R - 134a					
Number Of Faucet	1	1	1	2	2	2	2	3
Cabinet Material	PCM / SS 304	PCM / SS 304	PCM / SS 304					
Storage Tank - Food Grade SS	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Foot	Plastic	Plastic	Plastic	Plastic	Plastic	Plastic	Plastic	Plastic
Product Dimensions With Trough (WxDxH) mm	368 x 548 x 1033	461 x 621 x 1087	461 x 621 x 1087	461 x 621 x 1311	461 x 621 x 1311	566 x 746 x 1266	566 x 746 x 1391	970 x 780 x 1391
Grass Weight (Kg)	26.6	33.6	39	43.4	45.6	57.9	72.4	150
Power Plug /Cable	6 Amps, 1.5 Metre	16 Amps, 1.5 Metre	16 Amps, 1.5 Metre	16 Amps, 1.5 Metre				













Voltas Specialized Water Cooler also comes with an option of UV & RO Technology, Normal Water & Bubble Top. These comprises of an efficient, powerful and sturdy compressor for faster cooling, eco-friendly and food grade stainless steel to ensure pure & safe water. Stay refreshed with pure and cool water.



Soft Aesthetic



Longer Cooling Retention



Compact Design



Safety Compliant



Upto 40% Electricity Saving



Eco-friendly Refrigerant



Anti-corrosive Er Pre-coated Body



Iro M



In-situ Puf Insulation



Food Grade Stainless Steel

Description	20,40 PSS & FSS-NCW	40/80 PSS & FSS-NCW	150/150 PSS a PSS-NCH	40,180 PSS a FSS-UV	60/120PS5 & FSS-UV	150/150 PSS a FSS-UV	40/80 PSS & FSS-RO	60/120PSS & FSS-RO	40/80 PSS & PSS-UV-NCM	20/20 & 20/40PS5 & FSS-81
Storage Capacity (Litre)	40	80	150	80	120	150	80	120	80	20 / 40
Cooling Capacity (Litre/hour)	20	40	150	40	60	150	40	60	40	20 / 40
Refrigerant	R-134a	R-154a	R-22	R-134a	R-154a	R-22	R-154a	R-134a	R-134a	R-134a
Thermostat Type (Range)	Electromechanical (8 To 24°)	Bectromechanical (8 To 24°)	Electromechanical (8 To 24 °)	Bectromechanical (8 To 24°)	Electromechanical (8 To 24°)	Bectromechanical (8 To 24°)	Bectromechanical (8 To 24°)	Bectromechanical (8 To 24 °)	Bectromechanical (8 To 24°)	Bectromechanical (8 To 24°)
Number Of Faucet	2=1+1 (1 Normal+1 Cold)		2	2	2	2	2	2	2	1
Cabinet Material	PCM/SS 304	PCM/SS 304	PCM/SS 304	PCM/SS 304	PCM/SS 304	PC)4/SS 304	PCM/SS 304	PCM/SS 304	PCM/SS 304	PCM/SS 304
Storage Tank - Food Grade SS	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Foot	Plastic	Plastic	Plastic	Plastic	Plastic	Plastic	Plastic	Plastic	Plastic	Plastic
Product Dimensions With Trough (WxDxH) mm	461 x 621 x 1067	461 x 621 x 1087	566 x 746 x 1391	461 x 441 x 1350	566 x 566 x 1908	566 x 566 x 1435	461 x 441 x 1350	566 x 566 x 1308	461 x 441 x 1350	368 x 548 x 1053 461 x 621 x 1067
Grass Weight (Kg)	29.3	52.0	73.3	57.0	64.4	83.4	55	70.4	45/6	271 / 29.8
Power Plug / Cable	6 Amps, 1.5 Metre	6 Amps, 1.5 Metre	16 Amps, 1.5 Metre	6 Amps, 1.5 Metre	16 Amps, 1.5 Metre	16 Amps, 1.5 Metre	6 Amps, 1.5 Metre	16 Amps, 1.5 Metre	6 Amps, 1.5 Metre	6 Amps, 1.5 Metre



## **WATER DISPENSERS**













SPRING SERIES

**PURE SERIES** 

Presenting the new range of Spring Series Water Dispensers. Available in Table top, Floor standing storage cabinet, Refrigeration cabinet - smart choice for every office and home. The new range let you choose between Hot, Normal & Cold water at the touch of a button.



Soft Aesthetic Design



UV Grade Plastic For Long-lasting Appearance



Eco-friendly Refrigerant



Energy-efficient Compressor



LED Indicators



Silent Opertio



Safety Compliant



Tropicalized Machines



Compact Design



Anti-corrosive Pre-coated Body



Safety Lock



#### TECHNICAL SPECIFICATIONS WATER - DISPENSERS SPRING SERIES

Models	Minimagic-Spring TT+	Minimagic Spring RV +	Minimagic Spring FV+	Minimagic Spring FS +	Minimagic Spring R RB+	Minimagic Spring R RV +
Unit Dimension (W X D X H) in mm	310 x 355 x 490	310 x 330 x 970	310 x 330 x 970			
Refrigerant	R-134	R-134	R-134	R-134	R-134	R-134
Туре	Table Top	Floor Mounted	Floor Mounted	Floor Mounted	Floor Mounted	Floor Mounted
Cabinet	No	Cooling Cabinet	Storage Cabinet Only	No	Cooling Cabinet	Cooling Cabinet
Cabinet Capacity	NA	18 Litre	18 Litre Storage Only	NA	18 Litre	18 Litre
Cooling Cabinet Temperature	NA	<16°C	NA	NA	<16°C	<16°C
No. of Faucets	3	3	3	3	3	3
Cooling Capacity [Litre/Hour]	2.5	2.5	2.5	2.5	2.5	2.5
Cold Water Storage Capacity in Litre	3	3	3	3	3	3
Hot Water Storage Capacity in Litre	0.9	0.9	0.9	0.9	0.9	0.9
Display	LED Indicators	LED Indicators	LED Indicators	LED Indicators	LED Indicators	LED Indicators
Tap Function	Hot, Normal & Cold	Hot, Normal & Cold	Hot, Normal & Cold	Hot, Normal & Cold	Hot, Normal & Cold	Hot, Normal & Cold
Hot Water Dispensing Lock	Yes	Yes	Yes	Yes	Yes	Yes
Weight (Gross) in Kg	11.2	17.8	17.5	15.5	17.8	17.8

#### TECHNICAL SPECIFICATIONS WATER - DISPENSERS PURE SERIES

Models	Minimagic Pure T	Minimagic Pure R	Minimagic Pure F	Minimagic Pure FS	Minimagic Pearl RB	Minimagic Pearl RR
Unit Dimension (W X D X H) in mm	310 x 345 x 490	310 x 345 x 940	310 x 345 x 940	310 x 345 x 940	310 x 345 x 940	310 x 345 x 940
Refrigerant	R-134	R-134	R-134	R-134	R-134	R-134
Туре	Table Top	Floor Mounted	Floor Mounted	Floor Mounted	Floor Mounted	Floor Mounted
Cabinet	No	Cooling Cabinet	Storage Cabinet Only	No	Cooling Cabinet	Cooling Cabinet
Cabinet Capacity	NA	20 Litre	20 Litre Storage Only	NA	20 Litre	20 Litre
Cooling Cabinet Temperature	NA	<16°C	NA	NA	<16°C	<16°C
No. of Faucets	3	3	3	3	3	3
Cooling Capacity [Litre/Hour]	2.5	2.5	2.5	2.5	2.5	2.5
Cold Water Storage Capacity in Litre	3	3	3	3	3	3
Hot Water Storage Capacity in Litre	0.9	0.9	0.9	0.9	0.9	0.9
Display	LED Indicators	LED Indicators	LED Indicators	LED Indicators	LED Indicators	LED Indicators
Tap Function	Hot, Normal & Cold	Hot, Normal & Cold	Hot, Normal & Cold	Hot, Normal & Cold	Hot, Normal & Cold	Hot, Normal & Cold
Hot Water Dispensing Lock	Yes	Yes	Yes	Yes	Yes	Yes
Weight (Gross) in Kg	12.8	18.2	16.7	16.7	18.2	18.2

## **SMART COLD ROOMS**











Intelligent Controller with Remote Management



Design



Electricals



Technologies: Hermetic Semi Hermetic and Scre



Mobile App Operation




Green Refrigeran R-407c & R-404a

### **HERMETIC** CONDENSING UNITS

#### MEDIUM TEMPERATURE APPLICATION

VOLTAS MODEL	VCRO-M-REAX- 022	VCRO-M-REAX- 035	VCRO-M-REAX- 045	VCRO-M-REAX- 055	VCRO-M-REAX- 062	VCRO-M-REAX- 110
Capa city-watts (BTU)	2263 (7760)	3325 (11400)	4710(16150)	5460(18725)	6180(21200)	11006 (37700)
Po wer requirement	1PH-50HZ-230V	1PH/3PH-50HZ	1PH/3PH-50HZ	3PH-50HZ	3PH-50HZ	3PH-50HZ
Unit dimension (LxWxH) mm	815x324x560	840x395x600	840x395x600	1015x390x715	1015x390x715 10	50x410x1265
Weight in KG	45	60	62	70	75	107



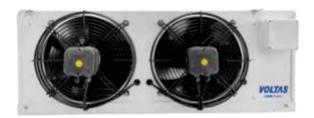

## **EVAPORATORS** - BOX TYPE

MEDIUM TEMPERATURE APPLICATION

Models	VCRI- BM022	VCRI- BM035	VCRI- BM045	VCRI- BM052	VCRI- BM062	VCRI- BM100	VCRI- BM110	VCRI- BM165	VCRI- BM240
Capacity KW@6KTD, -4C SST, R404a	2.2 (7500)	3.5 (12000)	4.5 (15000)	5.2 (18000)	6.2 (21000)	10 (34000)	11 (38000)	17.5 (60000)	24 (82000)
Air throw (meter)	7	10	12	11	12	15	15	18	20
Air volume (CFM)	865	1772	2595	2025	2595	4895	5190	16500	16100
Unit dimension (LxWxH) mm	606x262x395	988x262x395	1370x262x395	1370x262x395	1370x262x395	1813x314x479	2329x314x479	2320x485x650	2030x790x785

## **MEDICAL REFRIGERATION**



## ULTRA TEMPERATURE FREEZER -40°C TO -86°C

Voltas(-86C) Ultra Low Temp Freezers	HHD-MF-CE-DW-HW50	VHD-MF-CE-DW-HL218	VHD-MF-CE-DW-HL398S	VHD-MF-CE-DW-HL678S	
Cabinet Type	Chest	Upright	Upright	Upright	
Capacity(L)	50	218	398	678	
External Size(W*D*H)mm	650*606*1080	840*985*1568	785*1041*1947	1090*1025*1965	
Temperature Range	-40~-86°C	-40~-86°C	-40~-86°C	-40~-86°C	
Cooling Performance	-86°C	-86°C	-86°C	-86°C	
Controller	Microprocessor	Microprocessor	Microprocessor	Microprocessor	
Insulation Thickness(mm)	110	155	130	130	
Power Supply(V/HZ)	230±10%/50	230±10%/50	230±10%/50	230±10%/50	
Alarm					
Temperature	High/Low temperature & High ambient temperature	High/Low temperature & High ambient temperature	High/Low temperature & High ambient temperature	High/Low temperature & High ambient temperature	
Electrical	Power failure,Low battery	Power failure , Low battery	Power failure	Power failure	
System failure/errors alarms	Yes	Yes	Yes	Yes	



## (WHO PQS QUALIFIED) 2°C TO 8°C

ICE LINE REFRIGERATOR	VLS 204A AC	VLS 304A AC	VLS 354A AC	VLS 404A AC	VLS 504A AC
WHO PQS Code	E003/109	E003/110	E003/111	E003/112	E005/113
Gross volume, litres (cu. ft.)	113 (3.99)	157 (5.54)	209 (7.38)	235 (8.29)	314 (11.1)
Temperature range (43° C)	+2" to +8"C	+2" to +8"C	+2° to +8°C	+2° to +8°C	+2" to +8"C
Hold-over time, hours	54	55.5	54.7	55	55.27
Energy consumption-stable kWh/24h	0.57	0.60	0.62	0.67	0.64
Refrigerant	R600a	R600a	R600a	R600a	R600a
Freeze protection, grade	A	A	A	A	A
Climate class	т	Т	т	Т	т
Storage baskets, No.	3	5	7	7	10
Temperature control	Automatic	Automatic	Automatic	Automatic	Automatic
HxWxD (mm)	905x720x700	905x920x700	905x1120x700	905x1260x700	905x1560x700

NOTE: UPRIGHT DEEP FREEZER OLD MODEL NO BFS 345 IS NOW AVAILABLE AS CFS 344

## VOLTAS | COMMERCIAL REFRIGERATION





## BOUNDLESS COOLING POSSIBILITIES



## **Hard Top**

## Freezers



#### D070H161

**Volume:** 72 Liters

**Dimensions (mm):** 535 (W) x 518 (D) x 841 (H)

No. of Baskets: 1

Convertible

**Insulation:** 60mm Polyurethane

#### D150H164

106 Liters

635 (W) x 540 (D) x 885 (H)

1

Convertible

70mm Polyurethane

#### D225H122

190 Liters

760 (W) x 695 (D) x 840 (H)

1

Convertible

60mm Polyurethane



#### D300H124

Volume: 220 Liters

**Dimensions (mm):** 933 (W) x 612 (D) x 890 (H)

No. of Baskets: 1

Convertible

**Insulation:** 70mm Polyurethane

#### D300H224

224 Liters

933 (W) x 612 (D) x 890 (H)

1

Convertible

70mm Polyurethane



#### D350H225

Volume: 282 Liters

**Dimensions (mm):** 1205 (W) x 612 (D) x 840 (H)

No. of Baskets: 1

Convertible

**Insulation:** 70mm Polyurethane

#### D375H225

306 Liters

1205 (W) x 612 (D) x 890 (H)

1

Convertible

70mm Polyurethane

#### D475H224

444 Liters

1360 (W) x 695 (D) x 880 (H)

2

Convertible

60mm Polyurethane



#### D525H224

**Volume:** 505 Liters

**Dimensions (mm):** 1606 (W) x 695 (D) x 840 (H)

No. of Baskets: 2

Convertible

**Insulation:** 60mm Polyurethane

#### D625H225

568 Liters

1655 (W) x 690 (D) x 900 (H)

2

Convertible

60mm Polyurethane

#### D875H325

722 Liters

1860 (W) x 780 (D) x 908 (H)

1

Convertible

60mm Polyurethane

## **Glass Top**

### **Freezers**



#### F250GL25

**Volume:** 192 Liters

**Dimensions (mm):** 760 (W) x 695 (D) x 882 (H)

No. of Baskets: 1



#### F350GL25

**Volume:** 311 Liters

**Dimensions (mm):** 1060 (W) x 695 (D) x 882 (H)

No. of Baskets:





#### F450GL25

**Volume:** 422 Liters

**Dimensions (mm):** 1360 (W) x 695 (D) x 882 (H)

No. of Baskets: 2

#### F550GL25

**Volume:** 536 Liters

**Dimensions (mm):** 1650 (W) x 695 (D) x 882 (H)

No. of Baskets: 3

**Temperature Range:** <-17°C | **Insulation:** 60mm Polyurethane



#### F325GC23

Volume: 284 Liters

**Dimensions (mm):** 1095 (W) x 644 (D) x 888 (H)

No. of Baskets: 2

#### F425GC23

**Volume:** 350 Liters

**Dimensions (mm):** 1296 (W) x 644 (D) x 888 (H)

No. of Baskets: 3

## **Hatched Door & Hard Top**

**Eutectic Freezers** 



#### E325H220

Volume: 253 Liters

**Dimensions (mm):** 1060 (W) x 695 (D)

x 840 (H)

No. of Baskets: 1
Temperature Range: <-17°C

**Insulation:** 80mm Polyurethane

#### E425H220

351 Liters

1360 (W) x 695 (D)

x 840 (H)

2

<-17°C

80mm Polyurethane

#### E425D220

351 Liters

1360 (W) x 695 (D)

x 920 (H)

N.A.

<-17°C

80mm Polyurethane

#### E525D320

440 Liters

1600 (W) x 695 (D)

x 920 (H)

N.A.

<-17°C

80mm Polyurethane

# Glass Top Eutectic Freezers

## Scooping Freezers





#### E425GT20

**Volume:** 354 Liters

**Dimensions (mm):** 1360 (W) x 695 (D) x 795 (H)

No. of Baskets: 2 Temperature Range: <-17°C

**Insulation:** 80mm Polyurethane

#### $\pmb{F450GT25} \ \ \mathsf{Scooping}$

**Volume:** 422 Liters

**Dimensions (mm):** 1360 (W) x 695 (D) x

1226 (H)

No. of Baskets: 3

#### F550GT25 Scooping

536 Liters

1650 (W) x 695 (D) x

1226 (H)

4

**Temperature Range:** <-17°C | **Insulation:** 60mm Polyurethane

## Freezer on Wheels





#### G200H120

**Volume:** 117 Liters

**Dimensions (mm):** 940 (W) x 640 (D) x 785 (H)

No. of Baskets: N.A.

#### G300H220

206 Liters

990 (W) x 633 (D) x 890 (H)

N.A.

**Temperature Range:** <-17°C | **Insulation:** 60mm Polyurethane





#### B325H220

Volume: Freezer- 162 L / Cooler-123 L

Dimensions (mm): 1120 (W) x 695 (D) x 840 (H)

No. of Baskets: 1-Freezer Compartment

#### B425H220

Freezer- 162 L / Cooler-205 L 1360 (W) x 695 (D) x 840 (H) 1-Freezer Compartment

#### B525H220

Freezer- 215 L / Cooler-258 L 1610 (W) x 695 (D) x 840 (H) 1-Freezer Compartment

Temperature Range: Freezer application: <-17°C, Cooler Compartment: <10°C | Insulation: 60mm Polyurethane





SRF206HC-GL

Volume: 138 Liters

**Dimensions (mm):** 514 (W) x 549 (D) x

1265 (H)

No. of Shelves: 03 SRF350HC1-GLI

341 Liters

623 (W) x 680 (D)

x 1790 (H)

04

SRF500HC-GLI

623 (W) x 750 (D)

x 2089 (H)

465 Liters

05

SRF506HC-GLI

467 Liters

623 (W) x 715 (D) x

2099 (H)

06

#### SOUTH ZONE:

: Old No.14, New No. 47, 12th Avenue, Ashok Nagar, Chennai-600 083.

Coimbatore : Priya Ware House, No.52/1, Uzhalaipalar Street, Periyagounden, Thottam, Urumandampa

layam, G.N. Mills Post, Coimbatore-641 029

Cochin : B.No: 2/378A, Methanam Road, Eloor North, Udyogamandal P.O. Kochi-683 501.

Hyderabad : D. No: 2 - 99, K.S.Towers, Vennelagadda, Besides Sarvothama Care, Near Suchitra Centre, Jedimetla (V), Hyderabad-500 055.

Survey 42/1, Katha No. 191/142/1, Haralukkute Village, Begur Hobli, Trio Apparels Bangalore Compound, Hosapalya, Muneshwar Nagar, Kudlu Main Road, Bangalore-560 068. Door No. 2-105/2, Kamakshi Godown, Nallagunta Centre, Gollapudi, Vijayawada Rural, Krishna Dist., AP-521 225. Vijaywada

: Served from Vijaywada. Vizag

Hubli : C/O -Madhuban Industries, Plot No. 117, 179 Rayapur Industrial Area, Behind Navalur

Railway Goods Shed, Dharwad-580 009 (Karnataka)

EAST ZONE

Patna

Guwahati

Kolkata : 19A Jawaharlal Nehru Road, 3rd Floor, Flat No. D/1, Kolkata-700 087.

**Bhubaneswar**: C/O-Lingaraj Body Building Works, Plot No-1143, Near U.G.M.E School, At Hanspal, PS-Mancheswar, Bhubaneswar-752 101 (ODISHA).

: S S Vihar, 4th Floor, Flat No.107, Station Road, Karbigahiya, Beside Bhagawati Complex

and Ram Dulari Hotel, Patna-800 001

: 1st Floor, Upasana Palace Complex, R P Road, Ganeshguri, Guwahati, Kamrup Metropolitan Guwahati - 781 006, Assam.

Ranchi : Lower Chutia, Samlong, Ranchi, Jharkhand-834 001.

Chattisgarh : Acharya Nanesh Marg, D-272 M.R. Colony Tagore Nagar Square, Raipur-492 001 (CG)

#### WEST 70NF

Mumbai RO : 7B Pannalal Silk Mills Compound, 78 LBS Marg, Bhandup (W), Mumbai, Maharashtra.

: 501-505, 05th Floor, Ascot Centre, Sahar Road, Beside Hotel Hilton, Andheri (East), Mumbai-400 099 Mumbai HO

Pune Nashik : 2163/26, Manas Building, Near Nilayam theatre, Sadashiv Peth, Pune-411 030. : Bilyadal Bungalow, Gaikwad Mala, Near Jain Bhayan, Nasik Road, Pin-422 101, : Plot No. 54, Veer Sawarkar Nagar, Near Chhatrapati Square, Nagpur-440 015. Nagpur

: 203, ABC-II, Opp. Wagh Bakri Tea Lounge, Near St. Xavier College Corner, Off CG Road, Navrangpura, Ahmedabad-380 009. Ahmedabad

Rajkot : Served From Ahmedabad. : Shop No. 1 & 2, Ground Floor, Bearing S.V.No. 82/4, Mercurim, Agassaim-403 204, Goa. Goa

: Plot No.160 PU 4 Scheme No. 54, A.B. Road, Indore-452 001. Indore

Vapi : Contact No. 7567533958

#### NORTH ZONE:

: Unit No. GH-1, Ground Floor, Vardhman Grand Plaza, Manglam Place, Sector-3, Rohini, Delhi-110 085. Delhi

: Hall Mark, Special ("F"), Road No. 1, Industrial Estate 22 Godam, Jaipur, Rajasthan-302 006. : Ho. No. 610/2395 (533a) Faizullahganj - 3, Keshav Nagar, Sitapur Road, Lucknow (U.P)–226 021. Jaipur Lucknow

Ludhiana Chandigarh 4222/1, Bent Pura, Chandigarh Road, Behind Sictech Compurter, Ludhiana-141 010. Near Hotel KK Residency Shop No. 1, House No. 213 Sector 52, Village-Kajheri Chandigarh

(U.T)-160 047.

: Birpur, Purmandal Road, Samba Jammu-181 133 (INDIA). Jammu



#### **RELIABLE SERVICE**

Our extensive service network ensures swift service and maintenance for all Western Equipment.

Call us at: 70450 17000



#### **COMPLETE SALES** SUPPORT

With 25 branches across India, we're here to fulfill all your refrigeration needs.

Reach out at: 022 6907 0000



#### Western Refrigeration Pvt. Ltd.

Office Premises 501-505, 5th Floor, Ascot Centre, Sahar Road, Next to Hotel Hilton, Andheri (East), Mumbai-400 099. Email ID: sales@westernequipments.com

Contact No.: 022 6788 1200 / 201 Website: www.westernequipments.com

## **Double Door Models**



SRC1050HC-GL

**Gross Volume:** 

No. of Shelves:

#### SRC950HC-GL

No. of Shelves:

Capacity:

**External Dimensions (mm):** 1025 (W) x 707 (D) x 2052 (H) **Internal Dimensions (mm):** 945 (W) x 552 (D) x 1592 (H) Gross Volume: 807 Liters

300ml 330ml 500ml Bottle Can Pet

600 nos. 980 nos. 490 nos. 8+7 7+7 7+7

908 Liters

300ml 330ml 500ml Bottle Can Pet

675 nos. 1161 nos. 540 nos. Facing: 7+8 7+7 7+7





Double Internal LED Light


Low Maintenance Condenser





Hydro-carbon Refrigerant Models



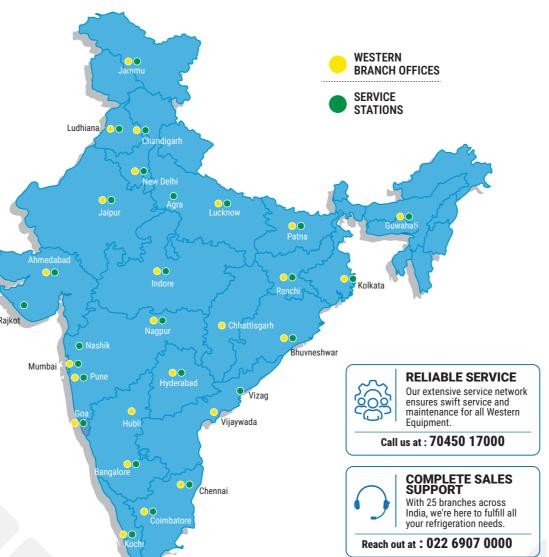



## **Header on Door Models**









#### SRC502HC-GL

**External Dimensions (mm):** 583 (W) x 707 (D) x 2075 (H) **Internal Dimensions (mm):** 503 (W) x 560 (D) x 1634 (H) **Gross Volume:** 460 Liters

No. of Shelves:

300ml | 330ml | 500ml Pet Bottle Can

332 nos. 567 nos. 273 nos. Capacity:



## SRC572HC-GL

640 (W) x 707 (D) x 2075 (H) 560 (W) x 560 (D) x 1634 (H) 510 Liters

300ml | 330ml | 500ml Bottle Can 376 nos. 648 nos. 312 nos.

**Energy Efficient** 

### SRC752HC-GL

720 (W) x 707 (D) x 2075 (H) 640 (W) x 560 (D) x 1634 (H) 585 Liters

> 300ml | 330ml | 500ml Bottle Can 400 nos. 630 nos. 315 nos.



Chennai : Old No.14, New No. 47, 12th Avenue, Ashok Nagar, Chennai-600 083. : B.No: 2/378A, Methanam Road, Eloor North, Udyogamandal P.O. Kochi-683 501. : D. No: 2 - 99, K.S. Towers, Vennelagadda, Besides Sarvothama Care, Near Suchitra Centre, Jedimetla (V), Hyderabad-500 055. Served from Vijaywada. C/O -Madhuban Industries, Plot No. 117, 179 Rayapur Industrial Area, Behind Navalur Railway Goods Shed, Dharwad-580 009 (Karnataka)

: Lower Chutia, Samlong, Ranchi, Jharkhand-834 001.

Chattisgarh : Acharya Nanesh Marg, D-272 M.R. Colony Tagore Nagar Square, Raipur-492 001 (CG)

Mumbai RO : 7B Pannalal Silk Mills Compound, 78 LBS Marg, Bhandup (W), Mumbai, Maharashtra.

Mumbai HO : 501-505, 05th Floor, Ascot Centre, Sahar Road, Beside Hotel Hilton, Andheri (East),
Mumbai-400 099 : 2163/26, Manas Building, Near Nilayam theatre, Sadashiv Peth, Pune-411 030.
 : Bilvadal Bungalow, Gaikwad Mala, Near Jain Bhavan, Nasik Road, Pin-422 101.
 : Plot No. 54, Veer Sawarkar Nagar, Near Chhatrapati Square, Nagpur-440 015.

d : 203, ABC-II, Opp. Wagh Bakri Tea Lounge, Near St. Xavier College Corner, Off CG Road, Navrangpura, Ahmedabad-380 009. : Shop No. 1 & 2, Ground Floor, Bearing S.V.No. 82/4, Mercurim, Agassaim-403 204, Goa. : Plot No.160 PU 4 Scheme No. 54, A.B. Road, Indore-452 001.

: Unit No. GH-1, Ground Floor, Vardhman Grand Plaza, Manglam Place, Sector-3, Rohini, Delhi-110 085.

: Hall Mark, Special ("F"), Road No. 1, Industrial Estate 22 Godam, Jaipur, Rajasthan-302 006. : Ho. No. 610/2395 (533a) Faizullahganj - 3, Keshav Nagar, Sitapur Road, Lucknow (U.P)–226 021.

Jammu : Birpur, Purmandal Road, Samba Jammu-181 133 (INDIA).



#### Western Refrigeration Pvt. Ltd.

Office Premises 501-505, 5th Floor, Ascot Centre, Sahar Road, Next to Hotel Hilton, Andheri (East), Mumbai-400 099. Email ID: sales@westernequipments.com Contact No.: 022 6788 1200 / 201 Website: www.westernequipments.com







## **Counter Top Models**



#### SRC20HC-GL

External Dimensions (mm): 350 (W) x 460 (D) x 507 (H) Internal Dimensions (mm): 270 (W) x 315 (D) x 380 (H)

25 Liters **Gross Volume:** 

02 No. of Shelves:

> 330ml Can

Capacity: 12 nos. 28 nos. 12 nos. Facing:



#### SRC30HC-GL

**External Dimensions (mm):** 350 (W) x 460 (D) x 630 (H) **Internal Dimensions (mm):** 270 (W) x 325 (D) x 500 (H)

**Gross Volume:** 37 Liters No. of Shelves:

330ml

16 nos. Capacity: 32 nos. 22 nos. Facing:



#### SRC60HC-GL

**External Dimensions (mm):** 462 (W) x 474 (D) x 664 (H) **Internal Dimensions (mm):** 382 (W) x 362 (D) x 542 (H)

**Gross Volume:** 59 Liters 02

No. of Shelves:

500ml

36 nos. 60 nos. 30 nos. Capacity:









Low Maintenance



Promotes Impulse



## Non - Canopy Models



#### SRC200HCF-GL

**External Dims. (mm):** 514 (W) x 549 (D) x 1265 (H) Internal Dims. (mm): 434 (W) x 454 (D) x 850 (H) **Gross Volume:** 167 Liters No. of Shelves:

300ml | 330ml | 500ml

105 nos. 198 nos. 90 nos. Capacity: Facing:

#### SRC280HCF-GL

514 (W) x 549 (D) x 1515 (H) 434 (W) x 454 (D) x 1100 (H) 216 Liters

300ml | 330ml | 500ml Bottle Can Pet 147 nos. 270 nos. 126 nos.

#### SRC360HCF-GL

514 (W) x 620 (D) x 1740 (H) 434 (W) x 520 (D) x 1330 (H) 302 Liters

300ml | 330ml | 500ml Bottle Can Pet

242 nos. 396 nos. 192 nos.

SRC501HCF-GL

573 (W) x 667 (D) x 2007 (H)

493 (W) x 520 (D) x 1580 (H)

300ml | 330ml | 500ml

300 nos. 567 nos. 273 nos.



SRC500HC-GLPD

583 (W) x 695 (D) x 2075 (H)

503 (W) x 558 (D) x 1634 (H)

300ml | 330ml | 500ml

332 nos. 567 nos. 273 nos.

Bottle Can Pet

#### SRC380HCF-GL

**External Dims. (mm):** 573 (W) x 655 (D) x 1740 (H) Internal Dims. (mm): 493 (W) x 520 (D) x 1330 (H) **Gross Volume:** 340 Liters

No. of Shelves:

300ml | 330ml | 500ml

279 nos. 469 nos. 224 nos. Capacity: Facing:

Internal LED Light

Low Maintenance Condenser

460 Liters

**Energy Efficient** 

405 Liters

Product features and specifications subject to change without notice

## **Canopy Models**



#### SRC201HCF-GL

**External Dimensions (mm):** 514 (W) x 549 (D) x 1475 (H) **Internal Dimensions (mm):** 434 (W) x 454 (D) x 850 (H) **Gross Volume:** 167 Liters No. of Shelves: 03

Can

Capacity: 105 nos. 198 nos. 90 nos. Facing:



SRC281HCF-GL

514 (W) x 549 (D) x 1725 (H) 434 (W) x 454 (D) x 1100 (H) 216 Liters

300ml | 330ml | 500ml 147 nos. 270 nos. 126 nos.



\*Also available in Grey

#### SRC381HCF-GL

573 (W) x 655 (D) x 1940 (H) 493 (W) x 520 (D) x 1330 (H) 340 Liters

330ml Can 279 nos. 469 nos. 224 nos.



\* Also available in Grey

#### SRC201HCF-GLWH SRC281HCF-GLWH **External Dimensions (mm):** 514 (W) x 549 (D) x 1475 (H)

**Internal Dimensions (mm):** 434 (W) x 454 (D) x 850 (H)

\* Also available in Grey

No. of Shelves:

The model does not have the temperature indicator

**Gross Volume:** 

300ml | 330ml | 500ml Can 105 nos. 198 nos. 90 nos. Capacity: Facing:

514 (W) x 549 (D) x 1725 (H) 434 (W) x 454 (D) x 1100 (H) 216 Liters

Low Maintenance

Condenser

300ml | 330ml | 500ml 147 nos. 270 nos. 126 nos.

### **SRC381HCF-GLWH**

\* Also available in Grey

573 (W) x 655 (D) x 1940 (H) 493 (W) x 520 (D) x 1330 (H) 340 Liters

> 330ml | 500ml 279 nos. 469 nos. 224 nos.

**Energy Efficient**